


Water Resources Data Kentucky Water Year 1998

Water-Data Report KY-98-1



U.S. Department of the Interior
U.S. Geological Survey

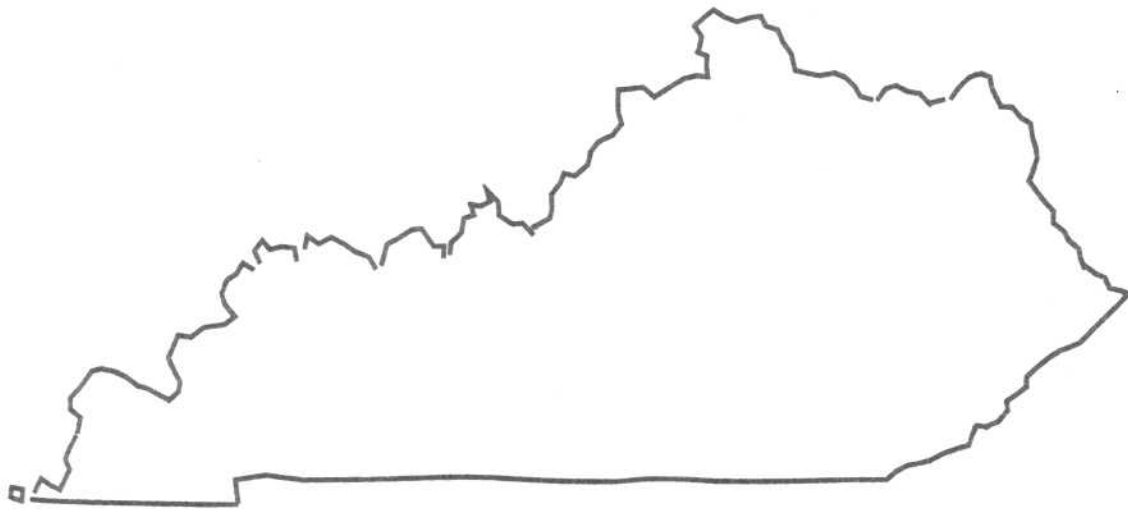

Prepared in cooperation with the
Commonwealth of Kentucky
and with other agencies

CALENDAR FOR WATER YEAR 1998

1997

OCTOBER							NOVEMBER							DECEMBER						
S	M	T	W	T	F	S	S	M	T	W	T	F	S	S	M	T	W	T	F	S
			1	2	3	4							1		1	2	3	4	5	6
5	6	7	8	9	10	11	2	3	4	5	6	7	8	7	8	9	10	11	12	13
12	13	14	15	16	17	18	9	10	11	12	13	14	15	14	15	16	17	18	19	20
19	20	21	22	23	24	25	16	17	18	19	20	21	22	21	22	23	24	25	26	27
26	27	28	29	30	31		23	24	25	26	27	28	29	28	29	30	31			
							30													

1998

JANUARY							FEBRUARY							MARCH						
S	M	T	W	T	F	S	S	M	T	W	T	F	S	S	M	T	W	T	F	S
				1	2	3	1	2	3	4	5	6	7	1	2	3	4	5	6	7
4	5	6	7	8	9	10	8	9	10	11	12	13	14	8	9	10	11	12	13	14
11	12	13	14	15	16	17	15	16	17	18	19	20	21	15	16	17	18	19	20	21
18	19	20	21	22	23	24	22	23	24	25	26	27	28	22	23	24	25	26	27	28
25	26	27	28	29	30	31								29	30	31				

APRIL							MAY							JUNE						
S	M	T	W	T	F	S	S	M	T	W	T	F	S	S	M	T	W	T	F	S
			1	2	3	4						1	2		1	2	3	4	5	6
5	6	7	8	9	10	11	3	4	5	6	7	8	9	7	8	9	10	11	12	13
12	13	14	15	16	17	18	10	11	12	13	14	15	16	14	15	16	17	18	19	20
19	20	21	22	23	24	25	17	18	19	20	21	22	23	21	22	23	24	25	26	27
26	27	28	29	30			24	25	26	27	28	29	30	28	29	30				
							31													


JULY							AUGUST							SEPTEMBER						
S	M	T	W	T	F	S	S	M	T	W	T	F	S	S	M	T	W	T	F	S
			1	2	3	4						1		1	2	3	4	5		
5	6	7	8	9	10	11	2	3	4	5	6	7	8	6	7	8	9	10	11	12
12	13	14	15	16	17	18	9	10	11	12	13	14	15	13	14	15	16	17	18	19
19	20	21	22	23	24	25	16	17	18	19	20	21	22	20	21	22	23	24	25	26
26	27	28	29	30	31		23	24	25	26	27	28	29	27	28	29	30			
							30	31												

U.S. Department of the Interior
U.S. Geological Survey

Water Resources Data Kentucky Water Year 1998

By D.L. McClain, F.D. Byrd, and A.C. Brown

Water-Data Report KY-98-1

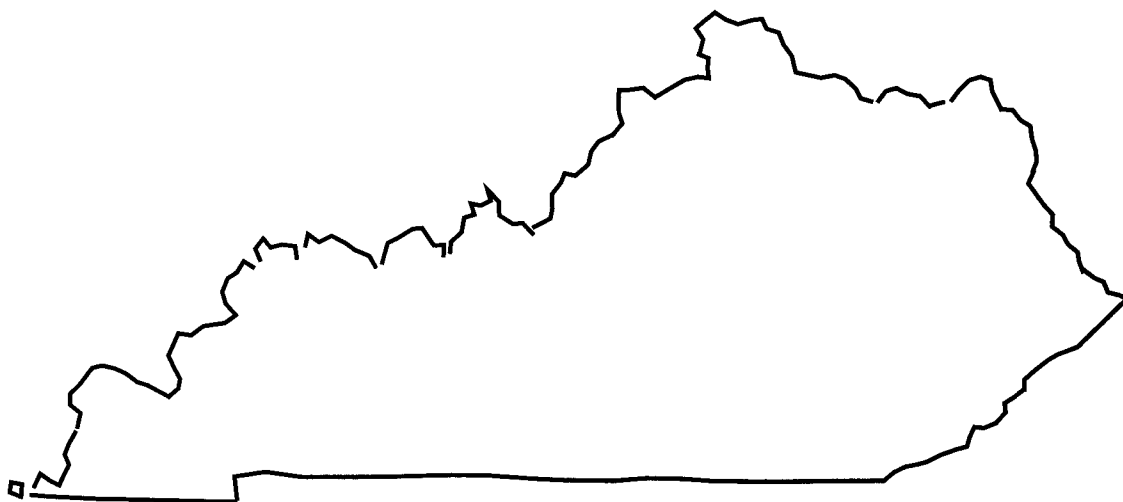

Prepared in cooperation with the
Commonwealth of Kentucky and with other agencies



U.S. DEPARTMENT OF THE INTERIOR
BRUCE BABBITT, Secretary

U.S. GEOLOGICAL SURVEY
Charles G. Groat, Director

For additional information write to:

District Chief, Water Resources Division
U.S. Geological Survey
9818 Bluegrass Parkway
Louisville, Kentucky 40299-1906

PREFACE

This volume of the annual hydrologic data report of Kentucky is one of a series of annual reports that document hydrologic data gathered from the U.S. Geological Survey's surface- and ground-water data-collection networks in each State, Puerto Rico, and the Trust Territories. These records of streamflow, ground-water levels, and water quality provide the hydrologic information needed by state, local, and federal agencies, and the private sector for developing and managing our Nation's land and water resources.

This report is the culmination of a concerted effort by dedicated personnel of the U.S. Geological Survey who collected, compiled, analyzed, verified, and organized the data, and who typed, edited, and assembled the report. The authors had primary responsibility for assuring that the information contained herein is accurate, complete, and adheres to Survey policy and established guidelines. Most of the data were collected, computed, and processed from the District and field offices.

The data were collected, computed, and processed by the following personnel:

H.C. Allen	J.D. Filbeck	G.K. McCombs
P.J. Bruenderman	B.S. Fink	B.L. Moore
S.J. Couts	Rene Garcia	C.R. Moses
A.S. Crain	M.S. Griffin	S.B. Pickard
R.S. Darnell	A.C. Haliday	R.E. Puckett
A.K. Dirrim	Zeke Hensley	D.W. Eichert
H.A. Hitchcock	K.J. Ruhl	E.A. Shreve
P.L. Faith	G.R. Martin	D.D. Zettwoch

This report was prepared in cooperation with the Commonwealth of Kentucky and with other agencies under the general supervision of Dennis L. McClain, Supervisory Hydrologic Technician, and Harry C. Rollins, District Chief, Kentucky.

REPORT DOCUMENTATION PAGEForm Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE March 29, 1999		3. REPORT TYPE AND DATES COVERED Annual—October 1, 1997 to September 30, 1998	
4. TITLE AND SUBTITLE Water Resources Data - Kentucky, Water Year 1998				5. FUNDING NUMBERS	
6. AUTHOR(S) D.L. McClain, F.D. Byrd, and A.C. Brown					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Geological Survey, Water Resources Division Kentucky District 9818 Bluegrass Parkway Louisville, KY 40299-1906				8. PERFORMING ORGANIZATION REPORT NUMBER USGS-WDR-KY-98-1	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Geological Survey, Water Resources Division Kentucky District 9818 Bluegrass Parkway Louisville, KY 40299-1906				10. SPONSORING / MONITORING AGENCY REPORT NUMBER USGS-WDR-KY-98-1	
11. SUPPLEMENTARY NOTES Prepared in cooperation with the Commonwealth of Kentucky and other agencies.					
12a. DISTRIBUTION / AVAILABILITY STATEMENT No restriction on distribution. This report may be purchased from National Technical Information Service, Springfield, VA 22161.				12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Water resources data for the 1998 water year for Kentucky consist of records of stage, discharge, and water quality of streams and lakes; and water levels of wells. This report includes daily discharge records for 96 stream-gaging stations. It also includes water-quality data for 37 stations sampled at regular intervals. Ground-water levels are published for 5 recording and 9 partial record sites. Precipitation data at a regular interval are published for 1 site. Additional water data were collected at various sites not involved in the systematic data-collection program and are published as miscellaneous measurement and analyses. These data represent that part of the National Water Data System operated by the U.S. Geological Survey and cooperating State and Federal agencies in Kentucky.					
14. SUBJECT TERMS *Kentucky, *Hydrologic data, *Surface waters, *Water quality, *Ground waters, Gaging stations, Streamflow, Flow rates, Lakes, Wells, Chemical analyses, Suspended sediments, Water temperature, Water levels				15. NUMBER OF PAGES 326	
				16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified		18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified		19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	
20. LIMITATION OF ABSTRACT					

CONTENTS

	Page
Preface	iii
List of gaging stations, in downstream order, for which records are published	vii
List of ground-water wells, by county, for which records are published.x
List of precipitation-quality stations, by county, for which records are published.x
Introduction.1
Cooperation.1
Summary of hydrologic conditions.2
Surface water2
Quality of water2
Ground-water levels4
Special networks and programs4
Explanation of records7
Station identification numbers7
Downstream order system.8
Latitude-longitude system.8
Records of stage and water discharge9
Data collection and computation9
Data presentation	10
Station manuscript	10
Data table of daily mean values	11
Statistics of monthly mean data	11
Summary statistics	12
Identifying estimated daily discharge.	13
Accuracy of the records	13
Other records available	14
Records of surface-water quality	14
Classification of records.	14
Arrangement of records	14
On-site measurements and sample collection.	15
Water temperature.	15
Sediment	15
Laboratory measurements.	16
Data presentation	16
Remarks codes	17
Dissolved trace-element concentrations	17
Change in National Trends Network procedures	18
Records of ground-water level	18
Data collection and computation	18
Data presentation	18
Records of precipitation-quality	19
On-site measurements and sample collection.	19
Data presentation	20
Access to WATSTORE data	20
Definition of terms	23
Publications on techniques of water-resources investigations	34
Station records, surface water	41
Discharge at partial-record stations	274
Crest-stage partial-record stations.	274
Station records, ground water	278
Ground-water levels listed by county	278
Station records, precipitation records	287
Discontinued gaging-station records	291
Discontinued water-quality records	299
Discontinued ground-water records	307
Index	310

ILLUSTRATIONS

		Page
Figure 1.	Mean discharge during 1998 water year and period of record for three representative gaging stations3
2.	Diagram showing system for numbering wells and miscellaneous sites (latitude and longitude)8
3.	Map showing location of gaging stations in Kentucky	38
4.	Map showing location of surface water quality stations in Kentucky	39
5.	Map showing location of surface-water quality stations in Jefferson County for the Metropolitan Sewer District Sampling Network	40
6.	Map showing location of observation wells in Elizabethtown	276
7.	Map showing location of observation wells in downtown Louisville	277

TABLES

Table 1.	Mean, maximum, and minimum streamflow for water year 1998 and recurrence intervals at selected stations5
2.	Statistical summary for selected inorganic constituents from 21 equipment blank samples collected at NASQAN stations during the period October 1995 through September 19986

**SURFACE-WATER STATIONS, IN DOWNSTREAM ORDER, FOR WHICH RECORDS ARE
PUBLISHED IN THIS VOLUME**

[Letters after station name designate type of data: (d) discharge, (g) stage, (c) chemical,
(b) biological, (t) water temperature, (s) sediment]

	Page
STATION NUMBER	
OHIO RIVER BASIN	
Ohio River:	
BIG SANDY RIVER BASIN	
Levisa Fork (head of Big Sandy River):	
Grapevine Creek near Phyllis (d)	03207965 41
Levisa Fork at Pikeville (d)	03209500 42
Johns Creek near Meta (d)	03210000 43
Levisa Fork at Paintsville (d)	03212500 44
LITTLE SANDY RIVER BASIN	
Little Sandy River at Grayson (d)	03216500 45
Ohio River at Greenup Dam (d)	03216600 46
TYGARTS CREEK BASIN	
Tygarts Creek near Greenup (d)	03217000 52
KINNICONICK CREEK BASIN	
Kinniconick Creek at Tannery (d)	03237250 53
LICKING RIVER BASIN	
Fox Creek:	
Rock Lick Creek above Unnamed Tributary near Sharkey (d)	03250310 54
Rock Lick Creek at State Highway 158 near Sharkey (d)	03250322 55
North Fork Licking River near Mt. Olivet (d)	03251200 56
South Fork Licking River:	
Hinkston Creek near Carlisle (d)	03252300 57
Licking River at Catawba (d)	03253500 58
Ohio River at Markland Dam (d)	03277200 59
KENTUCKY RIVER BASIN	
North Fork Kentucky River (head of Kentucky River):	
Leatherwood Creek at Daisy (d)	03277400 60
North Fork Kentucky River at Jackson (d)	03280000 61
Cutshin Creek at Wooton (d)	03280700 62
Middle Fork Kentucky River at Tallega (d)	03281000 63
Kentucky River:	
Red Bird River (head of South Fork Kentucky River) near Big Creek (d)	03281040 64
Goose Creek at Manchester (d)	03281100 65
South Fork Kentucky River at Booneville (d)	03281500 66
Kentucky River at lock 14, at Heidelberg (d)	03282000 67
Sturgeon Creek at Cressmont (d)	03282040 68
Red River near Hazel Green (d)	03282500 69
Red River at Clay City (d)	03283500 70
Kentucky River at lock 10, near Winchester (d)	03284000 71
Hickman Creek:	
East Hickman Creek at Andover Village (d)	03284520 72
East Hickman Creek Tributary near Lexington (d)	03284525 73
East Hickman Creek near East Hickman (d)	03284530 74
West Hickman Creek near East Hickman (d)	03284555 75
Dix River near Danville (d)	03285000 76
Kentucky River at lock 7, near High Bridge (d)	03286500 77
Kentucky River at lock 6, near Salvisa (d)	03287000 78
Kentucky River at lock 4, at Frankfort (d)	03287500 79
Elkhorn Creek:	
North Elkhorn Creek at Bryant Road (d)	03287580 80
North Elkhorn Creek at Winchester Road (d)	03287590 81
North Elkhorn Creek at Bryan Road (d)	03287600 82
North Elkhorn Creek near Georgetown (d)	03288000 83
North Elkhorn Creek at Georgetown (d)	03288100 84
Royal Spring at Georgetown (d)	03288110 85
South Elkhorn Creek at Fort Spring (d)	03289000 86

**SURFACE-WATER STATIONS, IN DOWNSTREAM ORDER, FOR WHICH RECORDS ARE
PUBLISHED IN THIS VOLUME--Continued**

[Letters after station name designate type of data: (d) discharge, (g) stage, (c) chemical,
(b) biological, (t) water temperature, (s) sediment]

	Page
	STATION NUMBER
OHIO RIVER BASIN--Continued	
Ohio River--Continued	
KENTUCKY RIVER --Continued	
Elkhorn Creek--continued	
Town Branch at Yarnallton (d)	03299200 87
South Elkhorn Creek near Midway (d)	03289300 88
Elkhorn Creek near Frankfort (d)	03289500 89
Kentucky River at lock 2, at Lockport (d)	03290500 90
Eagle Creek at Glencoe (d)	03291500 91
HARRODS CREEK BASIN	
Harrods Creek near Prospect (c)	03292473 92
GOOSE CREEK BASIN	
Goose Creek at Old Westport Road near St. Matthews (d, c)	03292474 93
Goose Creek at U.S. Hwy 42 near Glenview Acres (c)	03292475 95
Little Goose Creek near Harrods Creek (c)	03292480 96
BEARGRASS CREEK BASIN	
South Fork Beargrass Creek at Louisville (d,c)	03292500 97
South Fork Beargrass Creek at Eastern Parkway (c)	03292530 103
South Fork Beargrass Creek at Winter Avenue at Louisville (c)	03292550 108
Middle Fork Beargrass Creek at Louisville (d,c)	03293000 113
Middle Fork Beargrass Creek at Scenic Loop at Louisville (c)	03293200 117
Middle Fork Beargrass Creek at Lexington Road (c)	03293500 120
Muddy Fork at Mockingbird Valley Road at Louisville (c)	03293530 123
Ohio River at Louisville (d)	03294500 124
MILL CREEK BASIN	
Mill Creek Cutoff near Louisville (c)	03294550 125
Mill Creek at Orell Road near Louisville (c)	03294570 126
SALT RIVER BASIN	
Salt River at Glensboro (d)	03295400 127
Bullskin Creek near Simpsonville (d)	03295702 128
Brashears Creek at Taylorsville (d)	03295890 129
Floyds Fork:	
Floyds Fork near Pewee Valley (d)	03297900 130
Long Run near Fisherville (c)	03297980 131
Floyds Fork at Fisherville (d,c)	03298000 132
Pope Lick at Pope Lick Road near Middletown (c)	03298100 134
Chenoweth Run at Ruckriegal Parkway (c)	03298135 135
Chenoweth Run at Gelhaus Lane near Fern Creek (d, c)	03298150 150
Floyds Fork near Mount Washington (c)	03298200 165
Cedar Creek at Fairmount Road near Mt. Washington, Ky. (d,c)	03298242 166
Cedar Creek at Thixton Road near Louisville (c)	03298250 168
Pennsylvania Run at Mt. Washington Road near Louisville (c)	03298300 169
Salt River at Shepherdsville (d)	03298500 170
Long Lick near Clermont (d)	03298550 171
Rolling Fork:	
Beech Fork at Maud (d)	03300400 172
Beech Fork at Bardstown	03301000 173
Rolling Fork near Boston (d)	03301500 174
Wilson Creek at Harrison Fork Road near Deatsville (c)	03301575 175
Pond Creek:	
Southern Ditch:	
Southern Ditch at Minors Lane near Okolona (c)	03301880 176
Northern Ditch:	
Fern Creek at Old Bardstown Road at Louisville (d,c)	03301900 177
Northern Ditch at Okolona (d,c)	03301940 179
Spring Ditch at Private Drive near Okolona (c)	03301950 181
Pond Creek near Louisville (d,c)	03302000 182
Pond Creek at Pendleton Road near Louisville (c)	03302030 184

**SURFACE-WATER STATIONS, IN DOWNSTREAM ORDER, FOR WHICH RECORDS ARE
PUBLISHED IN THIS VOLUME--Continued**

[Letters after station name designate type of data: (d) discharge, (g) stage, (c) chemical,
(b) biological, (t) water temperature, (s) sediment]

	Page
STATION NUMBER	
OHIO RIVER BASIN--Continued	
Ohio River--Continued	
OTTER CREEK BASIN	
Otter Creek at Otter Creek Park near Rock Haven, Ky. (c)	03302110 185
Ohio River at Cannelton Dam (d,c)	03303280 186
GREEN RIVER BASIN	
Green River:	
Russell Creek near Columbia (d)	03307000 193
Green River at Munfordville (d)	03308500 194
Nolin River at White Mills (d)	03310300 195
Nolin River at Kyrock (d)	03311000 196
Beaver Creek at Hwy 31 E near Glasgow (d)	03312765 197
Barren River:	
West Fork Drakes Creek near Franklin (d)	03313700 198
Green River at Paradise (d)	03316500 199
GREEN RIVER BASIN--Continued	
Green River at lock 2, at Calhoun (d)	03320000 200
Pond River near Apex (d)	03320500 201
Pond River near Madisonville (g)	03321060 202
WABASH RIVER BASIN	
Wabash River at New Harmony, IN (c)	03378500 204
TRADEWATER RIVER BASIN	
Tradewater River at Olney (d)	03383000 210
Ohio River at Smithland Dam	03399800 211
CUMBERLAND RIVER BASIN	
Martins Fork Lake at Martins Fork Dam near Smith (c,t)	03400798 216
Martins Fork near Smith (d,c,t)	03400800 237
Cumberland River near Harlan (d)	03401000 244
Yellow Creek near Middlesboro (d)	03402000 245
Cumberland River at Pine St. Bridge at Pineville, KY (d)	03402900 246
Cumberland River at Barbourville (d)	03403500 247
Clear Fork at Saxton (d)	03403910 248
Cumberland River at Williamsburg (d)	03404000 249
Laurel River:	
Lynn Camp Creek at Corbin (d)	03404900 250
Rockcastle River at Billows (d)	03406500 251
South Fork Cumberland River near Stearns (d)	03410500 252
Beaver Creek near Monticello (d)	03413200 253
Little River near Cadiz (d)	03438000 255
TENNESSEE RIVER BASIN	
Tennessee River at Hwy 60, near Paducah, Ky (c)	03609750 256
Clarks River at Almo (d)	03610200 261
MASSAC CREEK BASIN	
Massac Creek near Paducah (d)	03611260 262
Ohio River at Metropolis, IL (d)	03611500 263
BAYOU CREEK BASIN	
Bayou Creek:	
Bayou Creek near Heath (d)	03611800 264
Bayou Creek near Grahamville (d)	03611850 265
Little Bayou Creek near Grahamville (d)	03611900 266
Ohio River at lock and dam 53, near Grand Chain, IL (c)	03612500 267
LOWER MISSISSIPPI RIVER BASIN	
BAYOU DE CHIEN BASIN	
Bayou De Chien near Clinton (d)	07024000 273

GROUND-WATER WELLS, BY COUNTY, FOR WHICH RECORDS ARE PUBLISHED GROUND-WATER LEVELS

Page

GRAVES COUNTY

Well 365210088391301 (Viola) 278

HARDIN COUNTY

Well 374035085525401 Local number OW-1-82 279

Well 374046085523501 Local number OW-1-81 280

JEFFERSON COUNTY

Well 381441085452701 Local number 45-14-71, (A-2). 281

Well 381442085444801 (Metro United Way) 282

Well 381445085460201 (9th & Broadway QW). 282

Well 381447085454001 Local number 45-14-66, (CJ&T #5). 282

Well 381501085445601 (UL Med.) 283

Well 381503085453301 Local number 45-15-36, (Ky. Towers). 283

Well 381504085443202 Local number CP-7A 283

Well 381517085455501 Local number 86-6. 284

Well 381518085453402 Local number 86-11 285

Well 381522085445201 (LSM) 286

Well 381538085453001 Local Number 86-7 286

PRECIPITAION STATION, BY COUNTY FOR WHICH RECORD IS PUBLISHED

ROWAN COUNTY, KENTUCKY

390706083324900 287

INTRODUCTION

Water resources data for the 1998 water year for Kentucky consist of records of stage, discharge, and water quality of streams and lakes; and water levels of wells. This report includes daily discharge records for 96 stream-gaging stations. It also includes water-quality data for 37 stations sampled at regular intervals. Ground-water levels are published for 5 recording and 9 partial record sites. Precipitation data at a regular interval are published for 1 site. Additional water data were collected at various sites not involved in the systematic data-collection program and are published as miscellaneous measurement and analyses. These data represent that part of the National Water Data System operated by the U.S. Geological Survey and cooperating State and Federal agencies in Kentucky.

Records of discharge or stage of streams, and contents or stage of lakes and reservoirs were first published in a series of U.S. Geological Survey water-supply papers titled, "Surface Water Supply of the United States." Through September 30, 1960, these water-supply papers were in an annual series and then in a 5-year series for 1961-65 and 1966-70. Records of chemical quality, water temperatures, and suspended sediment were published from 1941 to 1970 in an annual series of water-supply papers titled, "Quality of Surface Waters of the United States." Records of ground-water levels were published from 1944 to 1973 in a series of water-supply papers titled, "Ground-Water Levels in the United States."

Beginning with the 1961 water year and continuing through water year 1998, streamflow data have been released by the U.S. Geological Survey in annual reports on a State-boundary basis. Water-quality records beginning with the 1964 water year, and ground-water data since the 1971 water year have been similarly released either in separate reports or in conjunction with streamflow records. These reports provided rapid release of preliminary water data shortly after the end of the water year. The final data were then released in the water-supply paper series mentioned above. Beginning with the 1975 water year, water data will be released on a State-boundary basis in final form and will not be republished in the water-supply paper series. The 1975 and subsequent water year reports will be in a series which will carry an identification number consisting of the two-letter State abbreviation, the last two digits of the water year, and the volume number. For example, this report is identified as "U.S. Geological Survey Water-Data Report KY 98-1." These reports are for sale to the public for a nominal fee by the National Technical Information Service, U.S. Department of Commerce, Springfield, VA 22161.

Additional information, including current prices, for ordering specific reports may be obtained from the District Chief at the address given on the back of the title page or by telephone (502) 493-1900.

COOPERATION

The U.S. Geological Survey and organizations of the Commonwealth of Kentucky have had cooperative agreements for the systematic collection of streamflow records since 1938, for ground-water records since 1943, and for water-quality records since 1949. Organizations that assisted in collecting data through cooperative agreements with the Survey are

Ohio River Valley Water Sanitation Commission, Alan Vicory, Executive Director,
Kentucky Cabinet for Health Services, John H. Morse, Secretary,
Kentucky Geological Survey, Dr. Donald C. Haney, Director and State Geologist,
Kentucky Natural Resources and Environmental Protection Cabinet, James E. Bickford, Secretary,
Kentucky River Authority, Hugh Archer, Executive Director,
Kentuckiana Regional Planning and Development Agency, Jack L. Scriber, Executive Director,
Bullitt County, John D. Harper, Judge/Executive,
Jefferson County, David L. Armstrong, Judge/Executive,
Lexington-Fayette Urban County Government, Sandra M. Varellas, Judge/Executive,
City of Bardstown, Dr. Harry Spalding, Mayor,
City of Carrollton, William J. Welty, Sr., Mayor,

City of Elizabethtown, Patricia V. Durbin, Mayor,
 City of Georgetown, Warren Powers, Mayor,
 City of Glasgow, Charles B. Honeycutt, Mayor,
 City of Lewisburg, Gwyneth McKinney, Mayor,
 City of Louisville, Jerry E. Abramson, Mayor,
 City of Owingsville, Rawleigh M. Havens, Mayor,
 City of Simpsonville, Steve Eden, Mayor,
 Kentucky Heritage Resource Conservation & Development Council, John Overing, RC&D Coordinator,
 University of Louisville, Dr. John Schumaker, President,
 Water Resources Research Institute, Dr. Lyle Sendlein, and
 Assistance in the form of funds or services was given by the U.S. Army Corps of Engineers: the U.S. Environmental
 Protection Agency, Region IV--Atlanta; and the U.S. Navy.
 Organizations that supplied data are acknowledged in station descriptions.

SUMMARY OF HYDROLOGIC CONDITIONS

Surface Water

Monthly and annual mean streamflow for the 1998 water year and the period of record are shown in figure 1 for three representative streamflow-gaging stations in Kentucky.

Based on flow data collected at 23 surface-water gaging stations across Kentucky, annual peak flows during the 1998 water year had recurrence intervals ranging from less than two years to greater than twenty five years. The twenty five year recurrence interval occurred in the South-central part of the State in the Cumberland River Basin. Two sites in the Kentucky River Basin exceeded the ten year recurrence interval. Low flow recurrence intervals remained at the two year recurrence interval across the State except for one site in the Salt River Basin which exceeded the ten year recurrence interval (table 1).

No major flooding occurred in the State during the 1998 water year. Mean stream flows across the State ranged from twenty seven percent below to sixteen percent above the long term average.

Quality of Water

Water-quality data were collected primarily within the National Stream Quality Accounting Network (NASQAN) program. During water year 1998, five NASQAN stations were operated including Ohio River at Greenup Dam near Greenup, Kentucky (03216600), Ohio River at Cannelton Dam, Kentucky (03303280), Wabash River at New Harmony, Indiana (03378500), Tennessee River at Highway 60 near Paducah, Kentucky (03609750), and Ohio River at Dam 53 near Grand Chain, Illinois (03612500).

Three types of quality control (QC) samples ---concurrent replicates, field matrix spikes, and equipment blanks---are utilized to evaluate the results of collected NASQAN environmental samples. Concurrent replicates are two samples taken as closely together, in time and space, as possible. Concurrent replicate data provides a measure of sampling precision. At least two concurrent replicates are taken each water year at each NASQAN station.

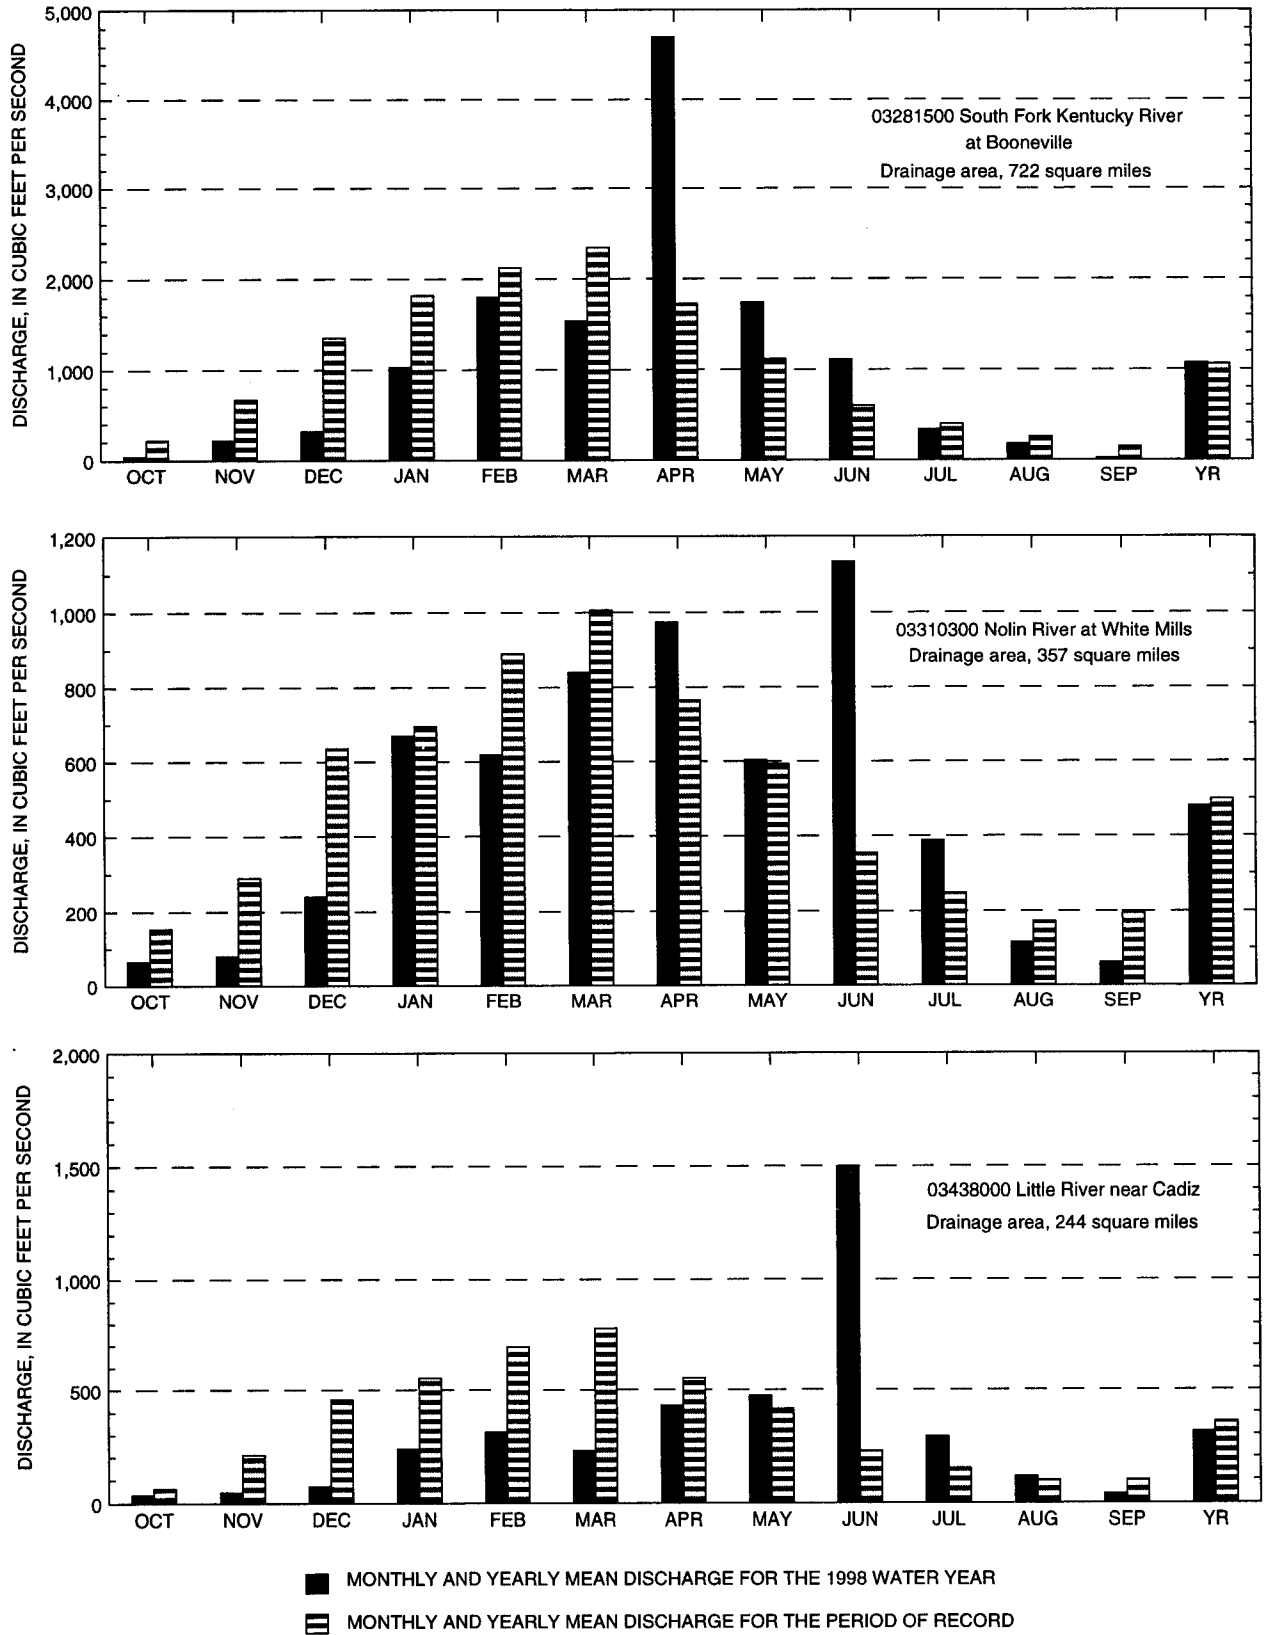


Figure 1. Mean discharge during 1998 water year and period of record for three representative gaging stations.

Field matrix spikes are used to evaluate the matrix effect on specific constituents. A spike is an addition of a known quantity of one or more compounds of interest to the sample prior to analysis. For the NASQAN program, one field pesticide matrix spike is performed in the early summer at each station every water year.

Equipment blanks are used to assess the potential contamination levels associated with cleaning procedures, shipping and handling procedures, as well as laboratory contamination. At least one set of blank samples is processed in the District laboratory for each sampling device every year prior to the collection of any environmental sample. Equipment blanks are also taken in the field, and thereby represent the same aspects of sample collection, field processing, transportation, and laboratory handling as the environmental sample. A statistical summary of the aggregated equipment blank inorganic results for selected constituents for the sampling period October 1995 through September 1998 is presented in table 2. Constituents with concentrations below the QC-MDL were not included in table 2, including antimony, barium, cadmium, iron, molybdenum, nickel, and silver. For purposes of generating a statistical summary, censored data results were set to each constituent's detection limit.

Acceptable concentrations for constituents from equipment blanks are either less than or no greater than two times the QC method detection limit (MDL). A second level criteria for those exceeding the QC-MDL is set at less than or equal to half the minimum reporting level limit (MRL) established for the environmental sample analysis.

Ground-Water Levels

Most currently monitored observation wells tap the alluvial aquifer underlying Downtown Louisville. Two observation wells are in or near the well field of Elizabethtown, in Hardin County, Kentucky, and are used to monitor water levels in the karst aquifer used for water supply by the city (fig. 6).

Ground-water levels in the alluvial aquifer underlying Louisville and Western Jefferson County respond to rainfall, pumpage, river stage, and natural flow to the Ohio River. In general, after reaching record high water levels caused by the flood of March 1997, ground water levels have returned to pre-flood conditions.

SPECIAL NETWORKS AND PROGRAMS

Hydrologic Benchmark Network is a network of 50 sites in small drainage basins around the country whose purpose is to provide consistent data on the hydrology, including water quality, and related factors in representative undeveloped watersheds nationwide, and to provide analyses on a continuing basis to compare and contrast conditions observed in basins more obviously affected by human activities.

Louisville and Jefferson County Metropolitan Sewer District (MSD) Sampling Network is a network of 27 surface-water-quality sites in Jefferson County, including a control site in Bernheim Forest in Bullitt County and Otter Creek Park in Meade County. The program is a cooperative effort between the U.S. Geological Survey and MSD to (1) determine the current status of water quality in the major streams in Jefferson County, (2) identify problem stream segments and whether they are impacted by point or nonpoint sources of pollution, and (3) obtain streamflow information on these streams. The 27 sites are sampled monthly for 9 months per year. At six of the sites, continuous-record streamflow is determined.

Table 1. Mean, maximum, and minimum streamflow for water year 1998 and recurrence intervals at selected stations.

Station number	Length of record (years)	Mean		Maximum		Minimum	
		Daily streamflow (ft ³ /s)	Percent of average	Peak streamflow (ft ³ /s)	Recurrence interval (years)	Daily streamflow (ft ³ /s)	Recurrence interval (years)
<u>TYGARTS CREEK BASIN</u>							
03217000	58	325	104	5200	<2	0.33	>2
<u>KINNICONICK CREEK BASIN</u>							
03237250	7	368	116	12700		0.12	
<u>LICKING RIVER BASIN</u>							
03251200	7	317	93	5910		.0	
<u>KENTUCKY RIVER BASIN</u>							
03280700	41	93.7	99	8650	>5	2.7	<2
03281040	26	260	92	20400	>10	2.5	<2
03281100	34	267	100	17300	<10	2.3	<2
03281500	65	1077	101	25000	<2	5.9	>2
03282500	43	85.9	97	1380	<2	0.20	>2
03283500	61	527	105	7230	<2	15	<2
03285000	56	542	113	15300	>2	0.72	<2
<u>BEARGRASS CREEK BASIN</u>							
03293000	54	26.6	104	948	<2	0.29	>2
<u>SALT RIVER BASIN</u>							
03298000	54	190	104	4870	<2	0.05	<2
03300400	26	691	106	12300	<2	0.51	>10
03301500	60	1967	107	17700	<2	6.1	>2
<u>GREEN RIVER BASIN</u>							
03307000	59	292	100	8140	<2	10	<2
03310300	39	481	96	4680	<2	53	<2
03320500	58	200	73	4770	<2	0.22	<2
<u>CUMBERLAND RIVER BASIN</u>							
03404900	25	99.4	110	6820	>25	1.1	=2
03406500	62	1063	112	21200	<2	14	<2
03410500	56	2056	115	41400	<2	28	>2
03438000	58	313	88	12900	>5	29	<2
<u>MASSAC CREEK BASIN</u>							
03611260	27	15.2	86	2840	>2	0.46	<2
<u>BAYOU DE CHIEN BASIN</u>							
07024000	53	104	100	3970	>2	19	<2

Table 2: Statistical summary for selected inorganic constituents from 21 equipment blank samples collected at NASQAN stations from October 1995 through September 1998.

[Constituents are in micrograms per liter except for calcium, sodium, and silica which are in milligrams per liter. SD, standard deviation; MDL, minimum detection limit; MRL, minimum reporting level]

Constituent	Mean	LCI	UCI	SD	MDL	MRL
Aluminum	0.345	0.118	0.300	0.300	0.610	0.300
Boron	2.318	1.537	2.000	2.000	3.794	2.00
Calcium	0.040	0.102	0.002	0.006	0.098	0.002
Chromium	0.203	0.015	0.200	0.200	0.200	0.200
Copper	0.468	0.685	0.200	0.200	2.300	0.200
Lead	0.325	0.113	0.300	0.300	0.300	0.300
Manganese	0.112	0.040	0.100	0.100	0.140	0.100
Silica	0.028	0.023	0.020	0.020	0.081	0.020
Sodium	0.046	0.060	0.025	0.025	0.210	0.030
Zinc	1.626	2.055	0.500	0.750	3.680	0.500

National Stream-Quality Accounting Network (NASQAN) monitors the water quality of large rivers within four of the Nation's largest river basins--the Mississippi, Columbia, Colorado, and Rio Grande. The network consists of 40 stations. Samples are collected with sufficient frequency that the flux of a wide range of constituents can be estimated. The objective of NASQAN is to characterize the water quality of these large rivers by measuring concentration and mass transport of a wide range of dissolved and suspended constituents, including nutrients, major ions, dissolved and sediment-bound heavy metals, common pesticides, and inorganic and organic forms of carbon. This information will be used (1) to describe the long-term trends and changes in concentration and transport of these constituents; (2) to test findings of the National Water-Quality Assessment Program (NAWQA); (3) to characterize processes unique to large-river systems such as storage and re-mobilization of sediments and associated contaminants; and (4) to refine existing estimates of off-continent transport of water, sediment, and chemicals for assessing human effects on the world's oceans and for determining global cycles of carbon, nutrients, and other chemicals.

The National Atmospheric Deposition Program/National Trends Network (NADP/NTN) provides continuous measurement and assessment of the chemical climate of precipitation throughout the United States. As the lead federal agency, the USGS works together with over 100 organizations to accomplish the following objectives; (1) Provide a long-term, spatial and temporal record of atmospheric deposition generated from a network of 191 precipitation chemistry monitoring sites. (2) Provide the mechanism to evaluate the effectiveness of the significant reduction in SO₂ emissions that began in 1995 as implementation of the Clean Air Act Amendments (CAAA) occurred. (3) Provide the scientific basis and nationwide evaluation mechanism for implementation of the Phase II CAAA emission reductions for SO₂ and NO_x scheduled to begin in 2000.

Data from the network, as well as information about individual sites, are available through the world wide web at:

<http://nadp.nrel.colostate.edu/NADP>

The National Water-Quality Assessment (NAWQA) Program of the U.S. Geological Survey is a long-term program with goals to describe the status and trends of water-quality conditions for a large, representative part of the Nation's ground- and surface-water resources; provide an improved understanding of the primary natural and human factors affecting these observed conditions and trends; and provide information that supports development and evaluation of management, regulatory, and monitoring decisions by other agencies.

Assessment activities are being conducted in 53 study units (major watersheds and aquifer systems) that represent a wide range of environmental settings nationwide and that account for a large percentage of the Nation's water use. A wide array of chemical constituents will be measured in ground water, surface water, streambed sediments, and fish tissues. The coordinated application of comparative hydrologic studies at a wide range of spatial and temporal scales will provide information for decision making by water-resources managers and a foundation for aggregation and comparison of findings to address water-quality issues of regional and national interest.

Communication and coordination between USGS personnel and other local, State, and federal interests are critical components of the NAWQA Program. Each study unit has a local liaison committee consisting of representatives from key federal, State, and local water resources agencies, Indian nations, and universities in the study unit. Liaison committees typically meet semiannually to discuss their information needs, monitoring plans and progress, desired information products, and opportunities to collaborate efforts among the agencies.

Additional information about the NAWQA Program is available through the world wide web at:

http://wwwrvares.er.usgs.gov/nawqa/nawqa_home.html

EXPLANATION OF THE RECORDS

The surface-water and ground-water records published in this report are for the 1998 water year that began October 1, 1997, and ended September 30, 1998. A calendar of the water year is provided on the inside of the front cover. The records contain streamflow data, and water-quality data for surface-water gaging stations. The locations of the stations and wells where the data were collected are shown in figures 3-7. The following sections of the introductory text are presented to provide users with a more detailed explanation of how the hydrologic data published in this report were collected, analyzed, computed, and arranged for presentation.

Traditionally, dissolved trace-element concentrations have been reported at the microgram per liter ($\mu\text{g/L}$) level. Recent evidence, mostly from large rivers, indicates that actual dissolved-phase concentrations for a number of trace elements are within the range of 10's to 100's of nanograms per liter (ng/L). Present data above the $\mu\text{g/L}$ level should be viewed with caution. Such data may actually represent elevated environmental concentrations from natural or human causes; however, these data could reflect contamination introduced during sampling, processing, or analysis. To confidently produce dissolved trace-element data with insignificant contamination, the U.S. Geological Survey will begin using new trace-element protocols in the near future.

Station Identification Numbers

Each data station, whether stream site or well, in this report is assigned a unique identification number. This number is unique in that it applies specifically to a given station and to no other. The number usually is assigned when a station is first established and is retained for that station indefinitely. The systems used by the U.S. Geological Survey to assign identification numbers for surface-water stations and for ground-water well sites differ, but both are based on geographic location. The "downstream order" system is used for regular surface-water stations and the "latitude-longitude" system is used for wells, and in Kentucky for surface-water stations where only miscellaneous measurements are made.

Downstream Order System

Since October 1, 1950, the order of listing hydrologic-station records in Survey reports is in a downstream direction along the main stream. All stations on a tributary entering upstream from a mainstream station are listed before that station. A station on a tributary that enters between two mainstream stations is listed between them. A similar order is followed in listing stations on first rank, second rank, and other ranks of tributaries. The rank of any tributary with respect to the stream to which it is immediately tributary is indicated by an indentation in the "List of Stations" in the front of this report. Each indentation represents one rank. This downstream order and system of indentation shows which stations are on tributaries between any two stations and the rank of the tributary on which each station is situated.

The station-identification number is assigned according to downstream order. In assigning station numbers, no distinction is made between partial-record stations and other stations; therefore, the station number for a partial-record station indicates downstream-order position in a list made up of both types of stations. Gaps are left in the series of numbers to allow for new stations that may be established; hence, the numbers are not consecutive. The complete eight-digit number for each station, such as 03208000, which appears just to the left of the station name, includes the two-digit Part number "03" plus the six-digit downstream-order number "208000." The Part number designates the major river basin; for example, Part "03" is the Ohio River Basin.

Latitude-Longitude System

The identification numbers for wells and miscellaneous surface-water sites are assigned according to the grid system of latitude and longitude. The number consists of 15 digits. The first six digits denote the degrees, minutes, and seconds of latitude, the next seven digits denote degrees, minutes, and seconds of longitude, and the last two digits (assigned sequentially) identify the wells or other sites within a 1-second grid. This site-identification number, once assigned, is a pure number and has no locational significance. In the rare instance where the initial determination of latitude and longitude are found to be in error, the station will retain its initial identification number; however, its true latitude and longitude will be listed in the LOCATION paragraph of the station description (fig.2).

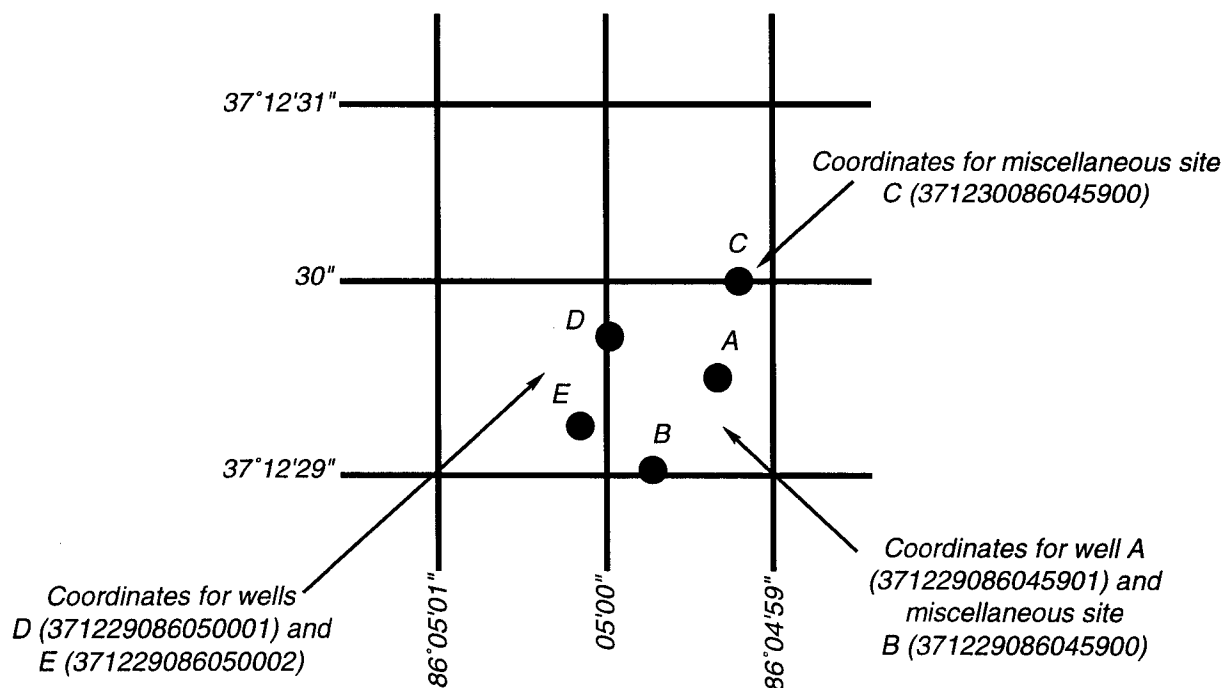


FIGURE 2.—SYSTEM FOR NUMBERING WELLS, SPRINGS, AND MISCELLANEOUS SITES (LATITUDE AND LONGITUDE).

Records of Stage and Water Discharge

Records of stage and water discharge may be complete or partial. Complete records of discharge are those obtained using a continuous stage-recording device through which either instantaneous or mean daily discharges may be computed for any time, or any period of time, during the period of record.

By contrast, partial records are obtained through discrete measurements without using a continuous stage-recording device and pertain only to a few flow characteristics, or perhaps only one. The nature of the partial record is indicated by table titles such as "Crest-stage partial records."

Data Collection and Computation

The data obtained at a complete-record gaging station on a stream or canal consist of a continuous record of stage, individual measurements of discharge throughout a range of stages, and notations regarding factors that may affect the relationships between stage and discharge. These data, together with supplemental information, such as weather records, are used to compute daily discharges. The data obtained at a complete-record gaging station on a lake or reservoir consist of a record of stage and of notations regarding factors that may affect the relationship between stage and lake content. These data are used with stage-area and stage-capacity curves or tables to compute water-surface areas and lake storage."

Continuous records of stage are obtained with data-collection platforms which transmit stage or with digital recorders that punch stage values on paper tapes at selected time intervals. Measurements of discharge are made with current meters using methods adopted by the Geological Survey as a result of experience accumulated since 1880. These methods are described in standard textbooks, in Water-Supply Paper 2175, and in U.S. Geological Survey Techniques of Water-Resources Investigations, Book 3, Chapter A6.

In computing discharge records, results of individual measurements are plotted against the corresponding stages, and stage-discharge relation curves are then constructed. From these curves, rating tables indicating the approximate discharge for any stage within the range of the measurements are prepared. If it is necessary to define extremes of discharge outside the range of the current-meter measurements, the curves are extended using: (1) logarithmic plotting; (2) velocity-area studies; (3) results of indirect measurements of peak discharge, such as slope-area or contracted-opening measurements, and computations of flow over dams or weirs; or (4) step-backwater techniques.

Daily mean discharges are computed by applying the daily mean stages (gage heights) to the stage-discharge curves or tables. If the stage-discharge relation is subject to change because of frequent or continual change in the physical features that form the control, the daily mean discharge is determined by the shifting-control method, in which correction factors based on the individual discharge measurements and notes of the personnel making the measurements are applied to the gage heights before the discharges are determined from the curves or tables. This shifting-control method also is used if the stage-discharge relation is changed temporarily because of aquatic growth or debris on the control. For some stations, formation of ice in the winter may so obscure the stage-discharge relations that daily mean discharges must be estimated from other information such as temperature and precipitation records, notes of observations, and records for other stations in the same or nearby basins for comparable periods.

At some stream-gaging stations, the stage-discharge relation is affected by the backwater from reservoirs, tributary streams, or other sources. This necessitates the use of the slope method in which the slope or fall in a reach of the stream is a factor in computing discharge. The slope or fall is obtained by means of an auxiliary gage set at some distance from the base gage. At some stations the stage-discharge relation is affected by changing stage; at these stations the rate of change in stage is used as a factor in computing discharge.

For some gaging stations, there are periods when no gage-height record is obtained, or the recorded gage height is so faulty that it cannot be used to compute daily discharge or contents. This happens when the recorder stops or otherwise fails to operate properly, intakes are plugged, the float is frozen in the well, or for various other reasons. For such periods, the daily discharges are estimated from the recorded range in stage, previous or following record,

discharge measurements, weather records, and comparison with other station records from the same or nearby basins. Information explaining how estimated daily-discharge values are identified in station records is included in the next two sections, "Data Presentation" (REMARKS paragraph) and "Identifying Estimated Daily Discharge."

Data Presentation

Streamflow data in this report are presented in a new format that is considerably different from the format in data reports prior to the 1991 water year. The major changes are that statistical characteristics of discharge now appear in tabular summaries following the water-year data table and less information is provided in the text or station manuscript above the table. These changes represent the results of a pilot program to reformat the annual water-data report to meet current user needs and data preferences.

The records published for each continuous-record surface-water discharge station (gaging station) now consists of four parts, the manuscript or station description; the data table of daily mean values of discharge for the current water year with summary data; a tabular statistical summary of monthly mean flow data for a designated period, by water year; and a summary statistics table that included statistical data of annual, daily, and instantaneous flows as well as data pertaining to annual runoff, 7-day low-flow minimums, and flow duration.

Station Manuscript

The manuscript provides, under various headings, descriptive information such as station location; period of record; historical extremes outside the period of record; record accuracy; and other remarks pertinent to station operation and regulation. The following information, as appropriate, is provided with each continuous record of discharge or lake content. Comments to follow clarify information presented under the various headings of station description.

LOCATION.--Information on locations is obtained from the most accurate maps available. The location of the gaging station with respect to the cultural and physical features in the vicinity and with respect to the referenced place mentioned in the station name is given. River mileages, given for only a few stations, were determined by methods given in "River Mileage Measurement," Bulletin 14, Revision of October 1968, prepared by the Water Resources Council or were provided by the U.S. Army Corps of Engineers.

DRAINAGE AREA.--Drainage areas are measured using the most accurate maps available. Because the type of maps available vary from one drainage basin to another, the accuracy of drainage areas likewise varies. Drainage areas are updated as better maps become available.

PERIOD OF RECORD.--This indicates the period for which records have been published for the station or for an equivalent station. An equivalent station is one that was in operation at a time that the present station was not and whose location was such that flow at it can reasonably be considered equivalent to flow at the present station.

REVISED RECORDS.--Because of new information, published records occasionally are found to be incorrect, and revisions are printed in later reports. Listed under this heading are all the reports in which revisions have been published for the station and the water years to which the revisions apply. If a revision did not include daily, monthly, or annual figures of discharge, that fact is noted after the year dates as follows: "(M)" means that only the instantaneous maximum discharge was revised; "(m)" that only the instantaneous minimum was revised; and "(P)" that only peak discharges were revised. If the drainage area has been revised, the report in which the most recently revised figure was first published is given.

GAGE.--The type of gage in current use, the datum of the current gage referred to National Geodetic Vertical Datum of 1929 (see glossary), and a condensed history of the types, locations, and datums of previous gages are given under this heading.

REMARKS.--All periods of estimated daily discharge will either be identified by date in this paragraph of the station description for water-discharge stations or flagged in the daily discharge table. (See next section, "Identifying Estimated Daily Discharge.") If a REMARKS paragraph is used to identify estimated record, the paragraph will begin with this information presented as the first entry. The paragraph is also used to present information relative to the accuracy of the records, to special methods of computation, and to conditions that affect natural flow at the station. In addition, information may be presented pertaining to average discharge data for the period of record; to extremes data for the period of record and the current year; and possibly to other pertinent items. For reservoir stations, information is given on the dam forming the reservoir, the capacity, outlet works and spillway, and purpose and use of the reservoir.

COOPERATION.--Records provided by a cooperating organization or obtained for the U.S. Geological Survey by a cooperating organization are identified here.

EXTREMES OUTSIDE PERIOD OF RECORD.--Included here is information concerning major floods or unusually low flows that occurred outside the stated period of record. The information may or may not have been obtained by the U.S. Geological Survey.

REVISIONS.--If a critical error in published records is discovered, a revision is included in the first report published following discovery of the error.

Although rare, occasionally the records of a discontinued gaging station may need revision. Because, for these stations, there would be no current or, possibly, future station manuscript published to document the revision in a "Revised Records" entry, users of data for these stations who obtained the record from previously published data reports may wish to contact the District Office (address given on the back of the title page of this report) to determine if the published records were ever revised after the station was discontinued. Of course, if the data for a discontinued station were obtained by computer retrieval, the data would be current and there would be no need to check because any published revision of data is always accompanied by revision of the corresponding data in computer storage.

Manuscript information for lake or reservoir stations differs from that for stream stations in the nature of the "Remarks" and in the inclusion of a skeleton stage-capacity table when daily contents are given.

Headings for AVERAGE DISCHARGE, EXTREMES FOR PERIOD OF RECORD, AND EXTREMES FOR CURRENT YEAR have been deleted and the information contained in these paragraphs, except for the listing of secondary instantaneous peak discharges in the EXTREMES FOR CURRENT YEAR paragraph, is now presented in the tabular summaries following the discharge table or in the REMARKS paragraph, as appropriate. No changes have been made to the data presentations of lake contents.

Data Table of Daily Mean Values

The daily table of discharge records for stream-gaging stations gives mean discharge for each day of the water year. In the monthly summary for the table, the line headed "TOTAL" gives the sum of the daily figures for each month; the line headed "MEAN" gives the average flow in cubic feet per second for the month; and the lines headed "MAX" and "MIN" give the maximum and minimum daily mean discharges, respectively, for each month. Discharge for the month also is usually expressed in cubic feet per second per square mile (line headed "CFSM"); or in inches (line headed "IN"); or in acre-feet (line headed "AC-FT"). Figures for cubic feet per second per square mile and runoff in inches or in acre-feet may be omitted if there is extensive regulation or diversion or if the drainage area included large noncontributing areas. At some stations monthly and (or) yearly observed discharges are adjusted for reservoir storage or diversion, or diversion data or reservoir contents are given. These figures are identified by a symbol and corresponding footnote.

Statistics of Monthly Mean Data

A tabular summary of the mean (line headed "MEAN"), maximum (line headed "MAX"), and minimum (line headed "MIN") of monthly mean flows for each month for a designated period is provided below the mean values table. The water years of the first occurrence of the maximum and minimum monthly flows are provided immediately below

those figures. The designated period will be expressed as "FOR WATER YEARS __- __, BY WATER YEAR (WY)," and will list the first and last water years of the range of years selected from the PERIOD OF RECORD paragraph in the station manuscript. It will consist of all of the station record within the specified water years, inclusive, including complete months of record for partial water years, if any, and may coincide with the period of record for the station. The water years for which the statistics are computed will be consecutive, unless a break in the station record is indicated in the manuscript.

Summary Statistics

A table titled "SUMMARY STATISTICS" follows the statistics of monthly mean data tabulation. This table consists of four columns, with the first column containing the line headings of the statistics being reported. The table provides a statistical summary of yearly, daily, and instantaneous flows, not only for the current water year but also for the previous calendar year and for a designated period as appropriate. The designated period selected, "WATER YEARS __- __," will consist of all the station record within the specified water years, inclusive, including complete months of record for partial water years, if any, and may coincide with the period of record for the station. The water years for which the statistics are computed will be consecutive, unless a break in the station record is indicated in the manuscript. All of the calculations for the statistical characteristics designated ANNUAL (see line headings below), except for the "ANNUAL 7-DAY MINIMUM" statistic, are calculated for the designated period using complete water years. The other statistical characteristics may be calculated using partial water years.

The date or water year, as appropriate, of the first occurrence of each statistic reporting extreme values of discharge is provided adjacent to the statistic. Repeated occurrences may be noted in the REMARKS paragraph of the manuscript or in footnotes. Because the designated period may not be the same as the station period of record published in the manuscript, occasionally the dates of occurrence listed for the daily and instantaneous extremes in the designated-period column may not be within the selected water years listed in the heading. When this occurs, it will be noted in the REMARKS paragraph or in footnotes. Selected streamflow duration curve statistics and runoff data are also given. Runoff data may be omitted if there is extensive regulation or diversion of flow in the drainage basin.

The following summary statistics data, as appropriate, are provided with each continuous record of discharge. Comments to follow clarify information presented under the various line headings of the summary statistics table.

ANNUAL TOTAL.--The sum of the daily mean values of discharge for the year. At some stations the annual total discharge is adjusted for reservoir storage or diversion. The adjusted figures are identified by a symbol and corresponding footnotes.

ANNUAL MEAN.--The arithmetic mean of the individual daily mean discharges for the year noted or for the designated period. At some stations the yearly mean discharge is adjusted for reservoir storage or diversion. The adjusted figures are identified by a symbol and corresponding footnotes.

HIGHEST ANNUAL MEAN.--The maximum annual mean discharge occurring for the designated period.

LOWEST ANNUAL MEAN.--The minimum annual mean discharge occurring for the designated period.

HIGHEST DAILY MEAN.--The maximum daily mean discharge for the year or for the designated period.

LOWEST DAILY MEAN.--The minimum daily mean discharge for the year or for the designated period.

ANNUAL 7-DAY MINIMUM.--The lowest mean discharge for 7 consecutive days for a calendar year or a water year. Note that most low-flow frequency analyses of annual 7-day minimum flows use a climactic year (April 1–March 31). The date shown in the summary statistics table is the initial date of the 7-day period. (This value should not be confused with the 7-day 10-year low-flow statistic).

INSTANTANEOUS PEAK FLOW.--The maximum instantaneous discharge occurring for the water year or for the designated period. Note that secondary instantaneous peak discharges above a selected base discharge are stored in District computer files for stations meeting certain criteria. Those discharge values may be obtained by writing to the District Office. (See address on back of title page of this report.)

INSTANTANEOUS PEAK STAGE.--The maximum instantaneous stage occurring for the water year or for the designated period. If the dates of occurrence for the instantaneous peak flow and instantaneous peak stage differ, the REMARKS paragraph in the manuscript or a footnote may be used to provide further information.

INSTANTANEOUS LOW FLOW.--The minimum instantaneous discharge occurring for the water year or for the designated period.

ANNUAL RUNOFF.--Indicates the total quantity of water in runoff for a drainage area for the year. Data reports may use any of the following units of measurement in presenting annual runoff data:

Acre-foot (AC-FT) is the quantity of water required to cover 1 acre to a depth of 1 foot and is equivalent to 43,560 cubic feet or about 326,000 gallons or 1,233 cubic meters.

Cubic feet per second per square mile (CFSM) is the average number of cubic feet of water flowing per second from each square mile of area drained, assuming the runoff is distributed uniformly in time and area.

Inches (INCHES) indicates the depth to which the drainage area would be covered if all of the runoff for a given time period were uniformly distributed on it.

10 PERCENT EXCEEDS.--The discharge that is exceeded 10 percent of the time for the designated period.

50 PERCENT EXCEEDS.--The discharge that is exceeded 50 percent of the time for the designated period.

90 PERCENT EXCEEDS.--The discharge that is exceeded 90 percent of the time for the designated period.

Data collected at partial-record stations follow the information for continuous-record sites. Data for partial-record discharge stations are presented in two tables. The first is a table of annual maximum stage and discharge at crest-stage stations, and the second is a table of discharge measurements at low-flow partial-record stations. The tables of partial-record stations are followed by a listing of discharge measurements made at sites other than continuous-record or partial-record stations. These measurements are generally made in times of drought or flood to give better areal coverage to those events. Those measurements and others collected for some special reason are called measurements at miscellaneous sites.

Identifying Estimated Daily Discharge

Estimated daily-discharge values published in the water-discharge tables of annual State data reports are identified either by flagging individual daily values with the letter symbol "e" and printing a table footnote, "e Estimated," or by listing the dates of the estimated record in the REMARKS paragraph of the station description.

Accuracy of the Records

The accuracy of streamflow records depends primarily on: (1) The stability of the stage-discharge relation or, if the control is unstable, the frequency of discharge measurements; and (2) the accuracy of measurements of stage, measurements of discharge, and interpretation of records.

The accuracy attributed to the records is indicated under "REMARKS." "Excellent" means that about 95 percent of the daily discharges are within 5 percent of their true values; "good," within 10 percent; and "fair," within 15 percent. Records that do not meet the criteria mentioned are rated "poor." Different accuracies may be attributed to different parts of a given record.

Daily mean discharges in this report are given to the nearest hundredth of a cubic foot per second for values less than 1 ft³/s; to the nearest tenth between 1.0 and 10 ft³/s; to whole numbers between 10 and 1,000 ft³/s; and to three significant figures for more than 1,000 ft³/s. The number of significant figures used is based solely on the magnitude of the discharge value. The same rounding rules apply to discharges listed for partial-record stations and miscellaneous sites.

Discharge at many stations, as indicated by the monthly mean, may not reflect natural runoff due to the effects of diversion, consumption, regulation by storage, increase or decrease in evaporation due to artificial causes, or to other factors. For such stations, figures of cubic feet per second per square mile and of runoff, in inches, are not published unless satisfactory adjustments can be made for diversions, for changes in contents of reservoirs, or for other changes incident to use and control. Evaporation from a reservoir is not included in the adjustments for changes in reservoir contents, unless it is so stated. Even at those stations where adjustments are made, large errors in computed runoff may occur if adjustments or losses are large in comparison with the observed discharge.

Other Records Available

Information used in the preparation of the records in this publication, such as discharge-measurement notes, gage-height records, temperature measurements, and rating tables is on file in the Kentucky District. Also, most of the daily mean discharges are in computer-readable form and have been analyzed statistically. Information on the availability of the unpublished information or on the results of statistical analyses of the published records may be obtained from the office whose address is given on the back of the title page of this report.

Records of Surface-Water Quality

Records of surface-water quality ordinarily are obtained at or near stream-gaging stations because interpretation of records of surface-water quality nearly always requires corresponding discharge data. Records of surface-water quality in this report may involve a variety of types of data and measurement frequencies.

Classification of Records

Water-quality data for surface-water sites are grouped into one of three classifications. A continuing-record station is a site where data are collected on a regularly scheduled basis. Frequency may be once or more times daily, weekly, monthly, or quarterly. A partial-record station is a site where limited water-quality data are collected systematically over a period of years. Frequency of sampling is usually less than quarterly. A miscellaneous sampling site is a location other than a continuing or partial-record station where random samples are collected to give better areal coverage to define water-quality conditions in the river basin.

A careful distinction needs to be made between "continuing records," as used in this report, and "continuous recordings," which refers to a continuous graph or a series of discrete values punched at short intervals on a paper tape or recorded electronically. Some records of water quality, such as temperature and specific conductance, may be obtained through continuous recordings; however, because of costs, most data are obtained only monthly or less frequently. Locations of stations for which records on the quality of surface water appear in this report are shown in figures 4 and 5.

Arrangement of Records

Water-quality records collected at a surface-water daily record station are published immediately following that record, regardless of the frequency of sample collection. Station number and name are the same for both records. Where a surface-water daily record station is not available or where the water quality differs significantly from that at the nearby surface-water station, the continuing water-quality record is published with its own station number and name in the regular downstream-order sequence. Water-quality data for partial-record stations and for miscellaneous sampling sites appear in separate tables following the table of discharge measurements at miscellaneous sites.

On-Site Measurements and Sample Collection

In obtaining water-quality data, a major concern needs to be assuring that the data obtained represent the in situ quality of the water. To assure this, certain measurements, such as water temperature, pH, and dissolved oxygen, need to be made on-site when the samples are taken. To assure that measurements made in the laboratory also represent the in situ water, carefully prescribed procedures need to be followed in collecting the samples, in treating the samples to prevent changes in quality pending analysis, and in shipping the samples to the laboratory. Procedures for on-site measurements and for collecting, treating, and shipping samples are given in publications on "Techniques of Water-Resources Investigations," Book 1, Chap. D2; Book 3, Chap. C2; Book 5, Chap. A1, A3, and A4. All of these references are listed under "PUBLICATIONS ON TECHNIQUES OF WATER-RESOURCES INVESTIGATIONS" which appears at the end of the introductory text. Detailed information on collecting, treating, and shipping samples may be obtained from the Kentucky District.

One sample can define adequately the water quality at a given time if the mixture of solutes throughout the stream cross section is homogeneous. However, the concentration of solutes at different locations in the cross section may vary widely with different rates of water discharge, depending on the source of material and the turbulence and mixing of the stream. Some streams must be sampled through several vertical sections to obtain a representative sample needed for an accurate mean concentration and for use in calculating load. All samples obtained for the National Stream Quality Accounting Network (see definitions) are obtained from at least several verticals. Whether samples are obtained from the centroid of flow or from several verticals depends on flow conditions and other factors which must be evaluated by the collector.

Chemical-quality data published in this report are considered to be the most representative values available for the stations listed. The values reported represent water-quality conditions at the time of sampling as much as possible, consistent with available sampling techniques and methods of analysis. In the rare case where an apparent inconsistency exists between a reported pH value and the relative abundance of carbon dioxide species (carbonate and bicarbonate), the inconsistency is the result of a slight uptake of carbon dioxide from the air by the sample between measurement of pH in the field and determination of carbonate and bicarbonate in the laboratory.

For chemical-quality stations equipped with digital monitors, the records consist of daily maximum, minimum, and mean values for each constituent measured and are based upon hourly punches beginning at 0100 hours and ending at 2400 hours for the day of record. More detailed records (hourly values) may be obtained from the Kentucky District whose address is given on the back of the title page of this report.

Water Temperature

Water temperatures are measured at most of the water-quality stations. In addition, water temperatures are taken at time of discharge measurements for water-discharge stations. For stations where water temperatures are taken manually once or twice daily, the water temperatures are taken at about the same time each day. Large streams have a small diurnal temperature change; shallow streams may have a daily range of several degrees and may follow closely the changes in air temperature. Some streams may be affected by waste-heat discharges.

At stations where recording instruments are used, either mean temperatures or maximum and minimum temperatures for each day are published. Water temperatures measured at the time of water-discharge measurements are on file in the Kentucky District office.

Sediment

Suspended-sediment concentrations are determined from samples collected by using depth-integrating samplers. Samples usually are obtained at several verticals in the cross section, or a single sample may be obtained at a fixed point and a coefficient applied to determine the mean concentration in the cross sections.

During periods of rapidly changing flow or rapidly changing concentration, samples may have been collected more frequently (twice daily or, in some instances, hourly). The published sediment discharges for days of rapidly changing flow or concentration were computed by the subdivided-day method (time-discharge weighted average). Therefore, for those days when the published sediment discharge value differs from the value computed as the product of discharge times mean concentration times 0.0027, the reader can assume that the sediment discharge for that day was computed by the subdivided-day method. For periods when no samples were collected, daily discharges of suspended sediment were estimated on the basis of water discharge, sediment concentrations observed immediately before and after the periods, and suspended-sediment loads for other periods of similar discharge.

At other stations, suspended-sediment samples were collected periodically at many verticals in the stream cross section. Although data collected periodically may represent conditions only at the time of observations, such data are useful in establishing seasonal relations between quality and streamflow and in predicting long-term sediment-discharge characteristics of the stream.

Laboratory Measurements

Sediment samples, samples for indicator bacteria, and daily samples for specific conductance are analyzed locally. All other samples are analyzed in the Geological Survey laboratory in Arvada, Colorado. Methods used in analyzing sediment samples and computing sediment records are given in TWRI, Book 5, Chap. C1. Methods used by the Geological Survey laboratory are given in TWRI, Book 1, Chap. D2; Book 3, Chap. C2; Book 5, Chap. A1, A3, and A4.

Data Presentation

For continuing-record stations, information pertinent to the history of station operation is provided in descriptive headings preceding the tabular data. These descriptive headings give details regarding location, drainage area, period of record, type of data available, instrumentation, general remarks, cooperation, and extremes for parameters currently measured daily. Tables of chemical, physical, biological, radiochemical data, and so forth, obtained at a frequency less than daily are presented first. Tables of "daily values" of specific conductance, pH, water temperature, dissolved oxygen, and suspended sediment then follow in sequence.

In the descriptive headings, if the location is identical to that of the discharge gaging station, neither the LOCATION nor the DRAINAGE AREA statements are repeated. The following information, as appropriate, is provided with each continuous-record station. Comments that follow clarify information presented under the various headings of the station description.

LOCATION.--See Data Presentation under "Records of Stage and Water Discharge;" same comments apply.

DRAINAGE AREA.--See Data Presentation under "Records of Stage and Water Discharge;" same comments apply.

PERIOD OF RECORD.--This indicates the periods for which there are published water-quality records for the station. The periods are shown separately for records of parameters measured daily or continuously and those measured less than daily. For those measured daily or continuously, periods of record are given for the parameters individually.

INSTRUMENTATION.--Information on instrumentation is given only if a water-quality monitor temperature record, sediment pumping sampler, or other sampling device is in operation at a station.

REMARKS.--Remarks provide added information pertinent to the collection, analysis, or computation of the records.

COOPERATION.--Records provided by a cooperating organization or obtained for the Geological Survey by a cooperating organization are identified here.

EXTREMES.--Maximums and minimums are given only for parameters measured daily or more frequently. None are given for parameters measured weekly or less frequently, because the true maximums or minimums may not have been sampled. Extremes, when given, are provided for both the period of record and for the current water year.

REVISIONS.--If errors in published water-quality records are discovered after publication, appropriate updates are made to the Water-Quality File in the U.S. Geological Survey's computerized data system, WATSTORE, and subsequently by monthly transfer of update transactions to the U.S. Environmental Protection Agency's STORET system. Because the usual volume of updates makes it impractical to document individual changes in the State data-report series or elsewhere, potential users of U.S. Geological Survey water-quality data are encouraged to obtain all required data from the appropriate computer file to insure the most recent updates.

The surface-water-quality records for partial-record stations and miscellaneous sampling sites are published in separate tables following the table of discharge measurements at miscellaneous sites. No descriptive statements are given for these records. Each station is published with its own station number and name in the regular downstream-order sequence.

Remarks Codes

The following remark codes may appear with the water-quality data in this section:

PRINTED

OUTPUT

REMARK	REMARK
E	Estimated value.
>	Actual value is known to be greater than the value shown.
<	Actual value is known to be less than the value shown.
K	Results based on colony count outside the acceptance range (non-ideal colony count).
L	Biological organism count less than 0.5 percent (organism may be observed rather than counted).
D	Biological organism count equal to or greater than 15 percent (dominant).
&	Biological organism estimated as dominant.
V	Analyte was detected in both the environmental sample and the associated blanks.

Dissolved Trace-Element Concentrations

NOTE.-- Traditionally, dissolved trace-element concentrations have been reported at the microgram per liter (ug/L) level. Recent evidence, mostly from large rivers, indicates that actual dissolved-phase concentrations for a number of trace elements are within the range of 10's to 100's of nanograms per liter (ng/L). Data above the ug/L level should be viewed with caution. Such data may actually represent elevated environmental concentrations from natural or human causes; however, these data could reflect contamination introduced during sampling, processing, or analysis. To confidently

produce dissolved trace-element data with insignificant contamination, the U.S. Geological Survey began using new trace-element protocols at some stations in water year 1994.

Change in National Trends Network Procedures

NOTE.-- Sample handling procedures at all National Trends Network stations were changed substantially on January 11, 1994, in order to reduce contamination from the sample shipping container. The data for samples before and after that date are different and not directly comparable. A tabular summary of the differences based on a special intercomparison study, is available from the NADP/NTN Coordination Office, Colorado State University, Fort Collins, CO 80523 (Telephone: 303-491-5643).

Records of Ground-Water Levels

Water-level data from selected observation wells are given in this report. These data are intended to provide a sampling and historical record of water-level changes. Locations of observation wells in Kentucky are shown in figures 6 and 7.

Data Collection and Computation

Measurements of water levels are made in many types of wells under varying conditions, but the methods of measurement are standardized to the extent possible. The equipment and measuring techniques used at each observation well ensure that measurements at each well are of consistent accuracy and reliability.

Tables of water-level data are presented by counties arranged in alphabetical order. The prime identification number for a given well is the 15-digit number that appears in the upper left corner of the table. The secondary identification number is the local well number.

Water-level records are obtained from direct measurements with a steel tape or from the graph or punched tape of a water-stage recorder. The water-level measurements in this report are given in feet with reference to land-surface datum (lsd). Land-surface datum is a datum plane that is approximately at land surface at each well. If known, the elevation of the land-surface datum is given in the well description. The height of the measuring point (MP) above or below land-surface datum is given in each well description.

Water levels are reported to as many significant figures as can be justified by the local conditions. For example, in a measurement of a depth to water of several hundred feet, the error of determining the absolute value of the total depth to water may be a few tenths of a foot, whereas the error in determining the net change of water level between successive measurements may be only a hundredth or a few hundredths of a foot. For lesser depths to water, the accuracy is greater. Accordingly, most measurements are reported to a hundredth of a foot, but some are given to a tenth of a foot or a larger unit.

Data Presentation

Each well record consists of two parts, the station description and the data table of water levels observed during the water year. The description of the well is presented first through use of descriptive headings preceding the tabular data. The comments to follow clarify information presented under the various headings.

LOCATION.--This paragraph follows the well-identification number and reports the latitude and longitude (given in degrees, minutes, and seconds); a landline location designation; the hydrologic-unit number; the distance and direction from a geographic point of reference; and the owner's name.

AQUIFER.--This entry designates by name (if a name exists) and geologic age the aquifer(s) open to the well.

WELL CHARACTERISTICS.--This entry describes the well in terms of depth, diameter, casing depth and/or screened interval, method of construction, use, and additional information such as casing breaks, collapsed screen, and other changes since construction.

INSTRUMENTATION.--This paragraph provides information on both the frequency of measurement and the collection method used, allowing the user to better evaluate the reported water-level extremes by knowing whether they are based on weekly, monthly, or some other frequency of measurement.

DATUM.--This entry describes both the measuring point and the land-surface elevation at the well. The measuring point is described physically (such as top of collar, notch in top of casing, plug in pump base, and so on) and in relation to land surface (such as 1.3 ft above land-surface datum). The elevation of the land-surface datum is described in feet above (or below) National Geodetic Vertical Datum of 1929 (NGVD of 1929); it is reported with a precision depending on the method of determination.

REMARKS.--This entry describes factors that may influence the water level in a well or the measurement of the water level. It should identify wells that also are water-quality observation wells, and may be used to acknowledge the assistance of local (non-Survey) observers.

PERIOD OF RECORD.--This entry indicates the period for which there are published records for the well. It reports the month and year of the start of publication of water-level records by the U.S. Geological Survey and the words "to current year" if the records are to be continued into the following year. Periods for which water-level records are available, but are not published by the Geological Survey, may be noted.

EXTREMES FOR PERIOD OF RECORD.--This entry contains the highest and lowest water levels of the period of published record, with respect to land-surface datum, and the dates of their occurrence.

A table of water levels follows the station description for each well. Water levels are reported in feet below land-surface datum and all taped measurements of water level are listed. The highest and lowest water levels of the water year and their dates of occurrence are shown on a line below the table. Because all values are not published for wells with recorders, the extremes may be values that are not listed in the table. Missing records are indicated by dashes in place of the water level.

Records of Precipitation Quality

The precipitation-quality data presented in this report represent analyses of time-composite samples, most often for a collection period of one week. This is in contrast to most of the published surface-water quality data which represent samples taken of specific times.

On-Site Measurements and Sample Collection

Precipitation samples are collected with wet/dry collectors. The wet/dry collector is the preferred precipitation sampler and consists of a bucket which is open only during periods of wet (rainfall, snow, etc.) precipitation. During dry periods the sample bucket is covered, thus excluding dry-fall precipitation from the sample.

National Trends Network (NTN) stations are equipped with weighing-bucket rain gages, which graphically record rainfall as well as count rainfall events. The other commonly-used recording gage consists of a rainfall catchment pipe and a float-driven digital recorder which periodically records the water-level in the pipe.

Time-composite wet-precipitation samples are collected and brought back to the laboratory and weighed. Rainfall quantity is estimated from the sample weight. A temperature-density correction can be applied if desired but normally this correction results in a very small change in the estimated quantity of rainfall. An estimation of the sampler efficiency is made by computing the ratio of rainfall amount collected in the sample bucket to that measured by the

recording rain gage. This collector efficiency ratio is an important indicator of possible collector malfunction. For example, a ratio substantially less than one indicates that the wet/dry collector was not opening properly and thus, excluding rainfall.

After weighing the sample, a small portion is removed for measurement of pH, specific conductance, and, in some instances, titratable acidity. The pH and specific conductance are both determined electrometrically according to methods described in the National Atmospheric Deposition Program "NADP Instruction Manual: Site Operation." The remainder of the sample is then used for laboratory chemical analyses. This portion of the sample is shipped to the laboratory raw and untreated. In the case of NTN operation, the original bucket is resealed and mailed to the Illinois State Water Survey Central Analytical Laboratory (CAL) for analysis. In all other instances, sample portions are preserved, treated, and analyzed according to specific project requirements.

Data Presentation

Records of precipitation quality are published following the "records of ground-water" section of this report. As with records of daily water discharge and surface-water quality, precipitation-quality records consist of two parts, a station header and a data table. The station header contains the descriptive information pertinent to the establishment, location, and operation of the site. Records are presented alphabetically by county and, within each county, by latitude, longitude, and sequence number. As with ground-water wells, the primary site identifier used for precipitation-quality stations in this report is the 15-digit composite of these three numbers. The following text presents a clarification of the subheadings which follow the station identification number and station name.

LOCATION.--See Data Presentation under "Records of Stage and Water Discharge;" same comments apply.

PERIOD OF RECORD.--This indicates the periods for which there are published precipitation-quality records for the station. Periods of record are presented separately for each type of sample collected at the site (in this report, wet precipitation, dry precipitation, and fog).

INSTRUMENTATION.--In this section, an abbreviated-style listing of the data-recording and sample-collection equipment permanently housed at the site is presented.

REMARKS.--This section is reserved for comments pertaining to unusual or extraordinary circumstances or to qualifying information which must be used accurately interpret the data presented for the site. More general comments which may pertain to several or all of the sites are presented in the "EXPLANATION OF RECORDS" section in the introductory part of the report.

COOPERATION.--Chemical-quality data were provided by National Atmospheric Deposition Program.

ACCESS TO USGS DATA

The USGS provides near real-time stage and discharge data for many of the gaging stations equipped with the necessary telemetry and historic daily-mean and peak-flow discharge data for most current or discontinued gaging stations through the world wide web (WWW). These data may be accessed at <http://www.water.usgs.gov>.

Some water-quality and ground-water data also are available through the WWW. In addition, data can be provided in various machine-readable formats on magnetic tape or 3-1/2 inch floppy disk. Information about the availability of specific types of data or products, and user charges, can be obtained locally from each of the Water Resources Division Districts Offices (See address on the back of the title page).

Water Quality-Control Data

Data generated from quality-control (QC) samples are a requisite for evaluating the quality of the sampling and processing techniques as well as data from the actual samples themselves. Without QC data, environmental sample data cannot be adequately interpreted because the errors associated with the sample data are unknown. The various types of QC samples collected by this district are described in the following section.

Procedures have been established for the storage of water-quality-control data within the USGS. These procedures allow for storage of all derived QC data and are identified so that they can be related to corresponding environmental samples.

Blank Samples

Blank samples are collected and analyzed to ensure that environmental samples have not been contaminated by the over all data-collection process. The blank solution used to develop specific types of blank samples is a solution that is free of the analytes of interest. Any measured value signal in a blank sample for an analyte (a specific component measured in a chemical analysis) that was absent in the blank solution is believed to be due to contamination. There are many types of blank samples possible, each designed to segregate a different part of the overall data-collection process. The types of blank samples collect in this district are:

Field blank- a blank solution that is subjected to all aspects of sample collection, field processing preservation, transportation, and laboratory handling as an environmental sample.

Trip blank- a blank solution that is put in the same type of bottle used for an environmental sample and kept with the set of sample bottles before and after sample collection.

Equipment blank- a blank solution that is processed through all equipment used for collection and processing an environmental sample (similar to a field blank but normally done in the more controlled conditions of the office).

Sampler blank- a blank solution that is poured or pumped through the same field sampler used for collecting an environmental sample.

Filter blank- a blank solution that is filtered in the same manner and through the same filter apparatus used for an environmental sample.

Splitter blank- a blank solution that is mixed and separated using a field splitter in the same manner and through the same apparatus used for an environmental sample.

Preservation blank- a blank solution that is treated with the sampler preservatives used for an environmental sample.

Reference Samples

Reference material is a solution or material prepared by a laboratory whose composition is certified for one or more properties so that it can be used to assess a measurement method. Samples of reference material are submitted for analysis to ensure that an analytical method is accurate for the known properties of the reference material. Generally, the selected reference material properties are similar to the environmental sample properties.

Replicate Samples are a set of environmental samples collected in a manner such that the samples are thought to be essentially identical in composition. Replicate is the general case for which a duplicate is the special case consisting of two samples. Replicate samples are collected and analyzed to establish the amount of variability in the data contributed by some part of the collection and analytical process. There are many types of replicate samples possible, each of which may yield slightly different results in a dynamic hydrologic setting, such as a flowing stream. The types of replicate samples collected in this district are: Sequential samples- a type of replicate sample in which the samples are collected one after the other, typically over a short time.

Split sample- a type of replicate sample in which a sample is split into subsamples contemporaneous in time and space.

Spike Samples

Spike samples are samples to which known quantities of a solution with one or more well-established analyte concentrations have been added. These samples are analyzed to determine the extent of matrix interference or degradation on the analyte concentration during sample processing analysis.

DEFINITION OF TERMS

Terms related to streamflow, water-quality, and other hydrologic data, as used in this report, are defined below. See also table for converting English units to International System (SI) Units on the inside of the back cover.

Acid neutralizing capacity (ANC) is the equivalent sum of all bases or base-producing materials, solutes plus particulates, in an aqueous system that can be titrated with acid to an equivalence point.

Acre-foot (AC-FT, acre-ft) is the quantity of water required to cover 1 acre to a depth of 1 foot and is equivalent to 43,560 cubic feet or about 326,000 gallons or 1,233 cubic meters.

Adenosine triphosphate (ATP) is an organic, phosphate-rich, compound important in the transfer of energy in organisms. Its central role in living cells makes it an excellent indicator of the presence of living material in water. A measurement of ATP therefore provides a sensitive and rapid estimate of biomass. ATP is reported in micrograms per liter of the original water sample.

Algae are mostly aquatic single-celled, colonial, or multi-celled plants, containing chlorophyll and lacking roots, stems, and leaves.

Algal growth potential (AGP) is the maximum algal dry weight biomass that can be produced in a natural water sample under standardized laboratory conditions. The growth potential is the algal biomass present at stationary phase and is expressed as milligrams dry weight of algae produced per liter of sample.

Alkalinity is the capacity of solutes in an aqueous system to neutralize acid.

Bacteria are microscopic unicellular organisms, typically spherical, rodlike, or spiral and threadlike in shape, often clumped into colonies. Some bacteria cause disease, while others perform an essential role in nature in the recycling of materials; for example, by decomposing organic matter into a form available for reuse by plants.

Total coliform bacteria are a particular group of bacteria that are used as indicators of possible sewage pollution. This group includes coliforms that inhabit the intestine of warm-blooded animals and those that inhabit soils. They are characterized as aerobic or facultative anaerobic, gram-negative, nonspore-forming, rod-shaped bacteria which ferment lactose with gas formation within 48 hours at 35C. In the laboratory these bacteria are defined as all the organisms that produce colonies with a golden-green metallic sheen within 24 hours when incubated at 35C plus or minus 1.0C on M-Endo medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample.

Fecal coliform bacteria are bacteria that are present in the intestine or feces of warm-blooded animals. They are often used as indicators of the sanitary quality of the water. In the laboratory they are defined as all organisms that produce blue colonies within 24 hours when incubated at 44.5C plus or minus 0.2C on M-FC medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample.

Fecal streptococcal bacteria are bacteria found also in the intestine of warm-blooded animals. Their presence in water is considered to verify fecal pollution. They are characterized as Gram-positive, cocci bacteria which are capable of growth in brain-heart infusion broth. In the laboratory they are defined as all the organisms which produce red or pink colonies within 48 hours at 35C plus or minus 1.0C on KF-streptococcus medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample.

Enterococcus bacteria are commonly found in the feces of humans and other warm-blooded animals. Although some strains are ubiquitous and not related to fecal pollution, the presence of enterococci in water is an indication of fecal pollution and the possible presence of enteric pathogens. Enterococcus bacteria are those bacteria which produce pink to red colonies with black or reddish-brown precipitate after incubation at 41 C on mE agar and subsequent transfer to EIA medium. Enterococci include Streptococcus feacalis, Streptococcus feacium, Streptococcus avium, and their variants.

Bedload is the sediment which moves along in essentially continuous contact with the streambed by rolling, sliding, and making brief excursions into the flow a few diameters above the bed.

Bed material is the sediment mixture of which a streambed, lake, pond, reservoir, or estuary bottom is composed.

Benthic invertebrates are invertebrate animals inhabiting the bottoms of lakes, streams, and other water bodies. They are useful as indicators of water quality.

Biochemical oxygen demand (BOD) is a measure of the quantity of dissolved oxygen, in milligrams per liter, necessary for the decomposition of organic matter by micro-organisms, such as bacteria.

Biomass is the amount of living matter present at any given time, expressed as the mass per unit area or volume of habitat.

Ash mass is the mass or amount of residue present after the residue from the dry mass determination has been ashed in a muffle furnace at a temperature of 500C for 1 hour. The ash mass values of zooplankton and phytoplankton are expressed in grams per cubic meter (g/m^3), and periphyton and benthic organisms in grams per square mile (g/m^2).

Dry mass refers to the mass of residue present after drying in an oven at 105 C for zooplankton and periphyton, until the mass remains unchanged. This mass represents the total organic matter, ash and sediment, in the sample. Dry-mass values are expressed in the same units as ash mass.

Organic mass or volatile mass of the living substance is the difference between the dry mass and ash mass and represents the actual mass of the living matter. The organic mass is expressed in the same units as for ash mass and dry mass.

Wet mass is the mass of living matter plus contained water.

Bottom material: See Bed material.

Cells/volume refers to the number of cells of any organism which is counted by using a microscope and grid or counting cell. Many planktonic organisms are multicelled and are counted according to the number of contained cells per sample, usually milliliters (mL) or liters (L).

Cfs-day is the volume of water represented by a flow of 1 cubic foot per second for 24 hours. It is equivalent to 86,400 cubic feet, approximately 1.9835 acre-feet, about 646,000 gallons, or 2,447 cubic meters.

Chemical oxygen demand (COD) is a measure of the chemically oxidizable material in the water and furnishes an approximation of the amount of organic and reducing material present. The determined value may correlate with BOD or with carbonaceous organic pollution from sewage or industrial wastes.

Chlorophyll refers to the green pigments of plants. Chlorophyll a and b are the two most common green pigments in plants.

Color unit is produced by one milligram per liter of platinum in the form of the chloroplatinate ion. Color is expressed in units of the platinum-cobalt scale.

Contents is the volume of water in a reservoir or lake. Unless otherwise indicated, volume is computed on the basis of a level pool and does not include bank storage.

Continuing-record station is a specified site which meets one or all conditions listed:

1. When chemical samples are collected daily or monthly for 10 or more months during the water year.
2. When water temperature records include observations taken one or more times daily.
3. When sediment discharge records include periods for which sediment loads are computed and are considered to be representative of the runoff for the water year.

Control designates a feature downstream from the gage that determines the stage-discharge relation at the gage.

This feature may be a natural constriction of the channel, an artificial structure, or a uniform cross section over a long reach of the channel.

Cubic foot per second (FT³/S, ft³/s) is the rate of discharge representing a volume of 1 cubic foot passing a given point during 1 second and is equivalent to approximately 7.48 gallons per second or 448.8 gallons per minute.

Discharge is the volume of water (or more broadly, volume of fluid plus suspended sediment), that passes given point within a given period of time.

Mean discharge (MEAN) is the arithmetic mean of individual daily mean discharges during a specific period.

Instantaneous discharge is the discharge at a particular instant of time.

Annual 7-day minimum is the lowest mean discharge for 7 consecutive days for a calendar year or a water year. Note that most low-flow frequency analyses of annual 7-day minimum flows use a climatic year (April 1-March 31). The date shown in the summary statistics table is the initial date of the 7-day period. (This value should not be confused with the 7-day 10-year low-flow statistic.)

Dissolved refers to that material in a representative water sample which passes through a 0.45 μ m membrane filter. This is a convenient operational definition used by Federal agencies that collect water data. Determinations of "dissolved" constituents are made on subsamples of the filtrate.

Dissolved-solids concentration of water is determined either analytically by the "residue-on-evaporation" method, or mathematically by totaling the concentrations of individual constituents reported in a comprehensive chemical analysis. During the analytical determination of dissolved solids, the bicarbonate (generally a major dissolved component of water) is converted to carbonate. Therefore, in the mathematical calculation of dissolved-solids concentration, the bicarbonate value, in milligrams per liter, is multiplied by 0.492 to reflect the change.

Drainage area of a stream at a specific location is that area, measured in a horizontal plane, enclosed by a topographic divide from which direct surface runoff from precipitation normally drains by gravity into the stream above the specified point. Figures of drainage area given herein include all closed basins, or noncontributing areas, within the area unless otherwise specified.

Drainage basin is a part of the surface of the earth that is occupied by a drainage system, which consists of a surface stream or a body of impounded surface water together with all tributary surface streams and bodies of impounded surface water.

Extractable organic halides (EOX) are organic compounds which contain halogen atoms such as chlorine. These organic compounds are semi-volatile and extractable by ethyl acetate from air-dried stream bottom sediments. The ethyl acetate extract is combusted, and the concentration is determined by microcoulometric determination of the halides formed. The concentration is reported as micrograms of chlorine per gram of the dry weight of the stream bottom sediments.

Hardness of water is a physical-chemical characteristic that is commonly recognized by the increased quantity of soap required to produce lather. It is computed as the sum of equivalents of polyvalent cations and is expressed as the equivalent concentration of calcium carbonate (CaCO₃).

High tide is the maximum height reached by each rising tide.

Hydrologic Benchmark Network is a network of 50 sites in small drainage basins around the country whose purpose is to provide consistent data on the hydrology, including water quality, and related factors in representative undeveloped watersheds nationwide, and to provide analyses on a continuing basis to compare and contrast conditions observed in basins more obviously affected by human activities.

Hydrologic unit is a geographic area representing part or all of a surface drainage basin or distinct hydrologic feature as delineated by the Office of Water Data Coordination on the State Hydrologic Unit Maps; each hydrologic unit is identified by an 8-digit number.

Low tide is the minimum height reached by each falling tide.

Mean high tide is the average of all high tides over a specified period.

Mean low tide is the average of all low tides over a specified period.

Mean water level is the average of all tides over a specified period.

Membrane filter is a thin microporous material of specific pore size used to filter bacteria, algae, and other very small particles from water.

Metamorphic stage refers to the stage of development that an organism exhibits during its transformation from an immature form to an adult form. This developmental process exists for most insects, and the degree of difference from the immature stage to the adult form varies from relatively slight to pronounced, with many intermediates. Examples of metamorphic stages of insects are egg-larva-adult or egg-nymph-adult.

Methylene blue active substances (MBAS) are apparent detergents. The determination depends on the formation of a blue color when methylene blue dye reacts with synthetic anionic detergent compounds.

Micrograms per gram (mg/g) is a unit expressing the concentration of a chemical constituent as the mass (micrograms) of the element per unit mass (gram) of material analyzed.

Micrograms per liter (UG/L, mg/L) is a unit expressing the concentration of chemical constituents in solution as mass (micrograms) of solute per unit volume (liter) of water. One thousand micrograms per liter is equivalent to one milligram per liter.

Microsiemens per centimeter (mS/cm, US/CM) is a unit expressing the amount of electrical conductivity of a solution as measured between opposite faces of a centimeter cube of solution at a specified temperature. Siemens is the International System of units nomenclature. It is synonymous with mhos and is the reciprocal of resistance in ohms.

Milligrams per liter (MG/L, mg/L) is a unit for expressing the concentration of chemical constituents in solution. Milligrams per liter represents the mass of solute per unit volume (liter) of water. Concentration of suspended sediment also is expressed in mg/L and is based on the mass of dry sediment per liter of water-sediment mixture

Most probable number (MPN) is an index of the number of coliform bacteria that, more probably than any other number, would give the results shown by the laboratory examination; it is not an actual enumeration. It is determined from the distribution of gas-positive cultures among multiple inoculated tubes.

Multiple-plate samplers are artificial substrates of known surface area used for obtaining benthic-invertebrate samples. They consist of a series of spaced, hardboard plates on an eyebolt.

National Geodetic Vertical Datum of 1929 (NGVD of 1929) is a geodetic datum derived from a general adjustment of the first order level nets of both the United States and Canada. It was formerly called "Sea Level Datum of 1929" or "mean sea level" in this series of reports. Although the datum was derived from the average sea level over a period of many years at 26 tide stations along the Atlantic, Gulf of Mexico, and Pacific Coasts, it does not necessarily represent local mean sea level at any particular place.

National Stream-Quality Accounting Network (NASQAN) monitors the water quality of large rivers within four of the Nation's largest river basins--the Mississippi, Columbia, Colorado, and Rio Grande. The network consists of 39 stations. Samples are collected with sufficient frequency that the flux of a wide range of constituents can be estimated. The objective of NASQAN is to characterize the water quality of these large rivers by measuring concentration and mass transport of a wide range of dissolved and suspended constituents, including nutrients, major ions, dissolved and sediment-bound heavy metals, common pesticides, and inorganic and organic forms of carbon. This information will be used (1) to describe the long-term trends and changes in concentration and transport of these constituents; (2) to test findings of the National Water-Quality Assessment Program (NAWQA); (3) to characterize processes unique to large-river systems such as storage and re-mobilization of sediments and associated contaminants; and (4) to refine existing estimates of off-continent transport of water, sediment, and chemicals for assessing human effects on the world's oceans and for determining global cycles of carbon, nutrients, and other chemicals.

The National Atmospheric Deposition Program/National Trends Network (NADP/NTN) provides continuous measurement and assessment of the chemical climate of precipitation throughout the United States. As the lead federal agency, the USGS works together with over 100 organizations to accomplish the following objectives; (1) Provide a long-term, spatial and temporal record of atmospheric deposition generated from a network of 191 precipitation chemistry monitoring sites. (2) Provide the mechanism to evaluate the effectiveness of the significant reduction in SO₂ emissions that began in 1995 as implementation of the Clean Air Act Amendments (CAAA) occurred. (3) Provide the scientific basis and nationwide evaluation mechanism for implementation of the Phase II CAAA emission reductions for SO₂ and NO_x scheduled to begin in 2000.

The National Water-Quality Assessment (NAWQA) Program of the U.S. Geological Survey is a long-term program with goals to describe the status and trends of water-quality conditions for a large, representative part of the Nation's ground- and surface-water resources; provide an improved understanding of the primary natural and human factors affecting these observed conditions and trends; and provide information that supports development and evaluation of management, regulatory, and monitoring decisions by other agencies.

Organism is any living entity.

Organism count/area refers to the number of organisms collected and enumerated in a sample and adjusted to the number per area habitat, usually square meter (m²), acre, or hectare. Periphyton, benthic organisms, and macrophytes are expressed in these terms.

Organism count/volume refers to the number of organisms collected and enumerated in a sample and adjusted to the number per sample volume, usually milliliter (mL) or liter (L). Numbers of planktonic organisms can be expressed in these terms.

Total organism count is the total number of organisms collected and enumerated in any particular sample.

Parameter Code is a 5-digit number used in the U.S. Geological Survey computerized data system, National Water Information System (NWIS), to uniquely identify a specific constituent. The codes used in NWIS are the same as those used in the U.S. Environmental Protection Agency data system, STORET. The Environmental Protection Agency assigns and approves all requests for new codes.

Partial-record station is a particular site where limited streamflow and/or water-quality data are collected systematically over a period of years for use in hydrologic analyses.

Particle size is the diameter, in millimeters (mm), of a particle determined by either sieve or sedimentation methods. Sedimentation methods (pipet, bottom-withdrawal tube, visual-accumulation tube) determine fall diameter of particles in either distilled water (chemically dispersed) or in native water (the river water at the time and point of sampling).

Particle-size classification used in this report agrees with the recommendation made by the American Geophysical Union Subcommittee on Sediment Terminology. The classification is as follows:

Classification Size (mm) Method of analysis

Clay 0.00024 - 0.004 Sedimentation

Silt .004 - .062 Sedimentation

Sand .062 - 2.0 Sedimentation/sieve

Gravel 2.0 - 64.0 Sieve

The partial-size distributions given in this report are not necessarily representative of all particles in transport in the stream. Most of the organic matter is removed, and the sample is subjected to mechanical and chemical dispersion before analysis in distilled water. Chemical dispersion is not used for native-water analysis.

Percent composition is a unit for expressing the ratio of a particular part of a sample or population to the total sample or population, in terms of types, numbers, mass, or volume.

Periphyton is the assemblage of microorganisms attached to and living upon submerged solid surfaces. While primarily consisting of algae, they also include bacteria, fungi, protozoa, rotifers, and other small organisms. Pesticides are chemical compounds used to control undesirable organisms. Major categories of pesticides include insecticides, miticides, fungicides, herbicides, and rodenticides.

Picocurie (PC, pCi) is one trillionth (1×10^{-12}) of the amount of radioactivity represented by a curie (Ci). A curie is the amount of radioactivity that yields 3.7×10^{10} radioactive disintegrations per second. A picocurie yields 2.22 dpm (disintegrations per minute).

Plankton is the community of suspended, floating, or weakly swimming organisms that live in the open water of lakes and rivers.

Phytoplankton is the plant part of the plankton. They are usually microscopic and their movement is subject to the water currents. Phytoplankton growth is dependent upon solar radiation and nutrient substances. Because they are able to incorporate as well as release materials to the surrounding water, the phytoplankton have a profound effect upon the quality of the water. They are the primary food producers in the aquatic environment and are commonly known as algae.

Blue-green algae are a group of phytoplankton organisms having a blue pigment, in addition to the green pigment called chlorophyll. Blue-green algae often cause nuisance conditions in water.

Diatoms are the unicellular or colonial algae having a siliceous shell. Their concentrations are expressed as number of cells per milliliter (cells/mL) of sample.

Green algae have chlorophyll pigments similar in color to those of higher green plants. Some forms produce algae mats or floating "moss" in lakes. Their concentrations are expressed as number of cells per milliliter (cells/mL) of sample.

Zooplankton is the animal part of the plankton. Zooplankton are capable of extensive movements within the water column and are often large enough to be seen with the unaided eye. Zooplankton are secondary consumers feeding upon bacteria, phytoplankton, and detritus. Because they are the grazers in the aquatic environment, the zooplankton are a vital part of the aquatic food web. The zooplankton community is dominated by small crustaceans and rotifers.

Polychlorinated biphenyls (PCB's) are industrial chemicals that are mixtures of chlorinated biphenyl compounds having various percentages of chlorine. They are similar in structure to organochlorine insecticides.

Primary productivity is a measure of the rate at which new organic matter is formed and accumulated through photosynthetic and chemosynthetic activity of producer organisms (chiefly, green plants). The rate of primary production is estimated by measuring the amount of oxygen released (oxygen method) or the amount of carbon assimilated by the plants (carbon method).

Milligrams of carbon per area or volume per unit time [$\text{mg C}/(\text{m}^2/\text{time})$] for periphyton and macrophytes and [$\text{mg C}/(\text{m}^3/\text{time})$] for phytoplankton are units for expressing primary productivity. They define the amount of carbon dioxide consumed as measured by radioactive carbon (carbon 14). The carbon 14 method is of greater sensitivity than the oxygen light and dark bottle method and is preferred for use in unenriched waters. Unit time may be either the hour or day, depending on the incubation period.

Milligrams of oxygen per area or volume per unit time [$\text{mg O}/(\text{m}^2/\text{time})$] for periphyton and macrophytes and [$\text{mg O}/(\text{m}^3/\text{time})$] for phytoplankton are the units for expressing primary productivity. They define production and respiration rates as estimated from changes in the measured dissolved-oxygen concentration. The oxygen light and dark bottle method is preferred if the rate of primary production is sufficient for accurate measurements to be made within 24 hours. Unit time may be either the hour or day, depending on the incubation period.

Radiochemical program is a network of regularly sampled water-quality stations where samples are collected to be analyzed for radioisotopes. The streams that are sampled represent major drainage basins in the conterminous United States.

Recoverable from bottom material is the amount of a given constituent that is in solution after a representative sample of bottom material has been digested by a method (usually using an acid or mixture of acids) that results in dissolution of readily soluble substances. Complete dissolution of all bottom material is not achieved by the digestion treatment and thus the determination represents less than the total amount (that is, less than 95 percent) of the constituent in the sample. To achieve comparability of analytical data, equivalent digestion procedures would be required of all laboratories performing such analyses because different digestion procedures are likely to produce different analytical results.

Return period is the average time interval between occurrences of a hydrological event of a given or greater magnitude, usually expressed in years. May also be called recurrence interval.

River mile as used herein, is the distance above the mouth of Delaware Bay, measured along the center line of the navigation channel or the main stem of the Delaware River. River mile data were furnished by the Delaware River Basin Commission.

Runoff in inches (IN., in.) shows the depth to which the drainage area would be covered if all the runoff for a given time period were uniformly distributed on it.

Sea level: In this report "sea level" refers to the National Geodetic Vertical Datum of 1929 (NGVD of 1929)--a geodetic datum derived from a general adjustment of the first-order level nets of both the United States and Canada, formerly called Sea Level Datum of 1929.

Sediment is solid material that originates mostly from disintegrated rocks and is transported by, suspended in, or deposited from water; it includes chemical and biochemical precipitates and decomposed organic material, such as humus. The quantity, characteristics, and cause of the occurrence of sediment in streams are influenced by environmental factors. Some major factors are degree of slope, length of slope, soil characteristics, land usage, and quantity and intensity of precipitation.

Bed load is the sediment that is transported in a stream by rolling, sliding, or skipping along the bed and very close to it. In this report, bed load is considered to consist of particles in transit within 0.25 ft of the streambed.

Bed load discharge (tons per day) is the quantity of bed load measured by dry weight that moves past a section as bed load in a given time.

Suspended sediment is the sediment that at any given time is maintained in suspension by the upward components of turbulent currents or that exists in suspension as a colloid.

Suspended-sediment concentration is the velocity-weighted concentration of suspended sediment in the sampled zone (from the water surface to a point approximately 0.3 ft above the bed) expressed as milligrams of dry sediment per liter of water-sediment mixture (mg/L). The entire sample is used for the analysis.

Mean concentration is the time-weighted concentration of suspended sediment passing a stream section during a 24-hour day.

Suspended-sediment discharge (tons/day) is the rate at which dry mass of sediment passes a section of a stream or is the quantity of sediment, as measured by dry mass or volume, that passes a section in a given time. It is calculated in units of tons per day as follows: concentration (mg/L) x discharge (ft³/s) x 0.0027.

Suspended-sediment load is a general term that refers to material in suspension. It is not synonymous with either discharge or concentration.

Suspended total residue at 105 Deg. C concentration is the concentration of suspended sediment in the sampled zone expressed as milligrams of dry sediment per liter of water-sediment mixture (mg/L). A small aliquot of the sample is used for the analysis.

Total sediment discharge (tons/day) is the sum of the suspended-sediment discharge and the bed-load discharge. It is the total quantity of sediment, as measured by dry mass or volume, that passes a section during a given time.

Total sediment load or total load is a term which refers to the total sediment (bed load plus suspended-sediment load) that is in transport. It is not synonymous with total sediment discharge.

Sodium-adsorption-ratio (SAR) is the expression of relative activity of sodium ions in exchange reactions within soil and is an index of sodium or alkali hazard to the soil. Waters range in respect to sodium hazard from those which can be used for irrigation on almost all soils to those which are generally unsatisfactory for irrigation.

Solute is any substance that is dissolved in water.

Specific conductance is a measure of the ability of a water to conduct an electrical current. It is expressed in microsiemens per centimeter at 25C. Specific conductance is related to the type and concentration of ions in solution and can be used for approximating the dissolved-solids content of the water. Commonly, the concentration of dissolved solids (in milligrams per liter) is from 55 to 75 percent of the specific conductance (in microsiemens). This relation is not constant from stream to stream, and it may vary in the same source with changes in the composition of the water.

Stage-discharge relation is the relation between gage height (stage) and volume of water, per unit of time, flowing in a channel.

Streamflow is the discharge that occurs in a natural channel. Although the term "discharge" can be applied to the flow of a canal, the word "streamflow" uniquely describes the discharge in a surface stream course. The term "streamflow" is more general than "runoff" as streamflow may be applied to discharge whether or not it is affected by diversion or regulation.

Substrate is the physical surface upon which an organism lives.

Natural substrate refers to any naturally occurring immersed or submersed solid surface, such as a rock or tree, upon which an organism lives.

Artificial substrate is a device which is purposely placed in a stream or lake for colonization or organisms. The artificial substrate simplifies the community structure by standardizing the substrate from which each sample is taken. Examples of artificial substrates are basket samplers (made of wire cages filled with clean streamside rocks) and multiplate samplers (made of hardboard) for benthic organism collection, and plexiglass strips for periphyton collection.

Surface area of a lake is that area outlined on the latest USGS topographic map as the boundary of the lake and measured by a planimeter in acres. In localities not covered by topographic maps, the areas are computed from the best maps available at the time planimetered. All areas shown are those for the stage when the planimetered map was made.

Surficial bed material is the part (0.1 to 0.2 ft) of the bed material that is sampled using U.S. Series Bed-Material Samplers.

Suspended (as used in tables of chemical analyses) refers to the amount (concentration) of undissolved material in a water-sediment mixture. It is associated with the material retained on a 0.45-micrometer filter.

Suspended, recoverable is the amount of a given constituent that is in solution after the part of a representative water-suspended sediment sample that is retained on a 0.45 um membrane filter has been digested by a method (usually using a dilute acid solution) that results in dissolution of only readily soluble substances. Complete dissolution of all the particulate matter is not achieved by the digestion treatment and thus the determination represents something less than the "total" amount (that is, less than 95 percent) of the constituent present in the sample. To achieve comparability of analytical data, equivalent digestion procedures are required of all laboratories performing such analyses because different digestion procedures are likely to produce different analytical results.

Determinations of "suspended, recoverable" constituents are made either by analyzing portions of the material collected on the filter or, more commonly, by difference, based on determinations of (1) dissolved and (2) total recoverable concentrations of the constituent.

Suspended, total is the total amount of a given constituent in the part of a representative water-suspended sediment sample that is retained on a 0.45 um membrane filter. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent determined. A knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to determine when the results should be reported as "suspended, total."

Determinations of "suspended, total" constituents are made either by analyzing portions of the material collected on the filter or, more commonly, by difference, based on determinations of (1) dissolved and (2) total concentrations of the constituent.

Synoptic Studies Short-term investigations of specific water-quality conditions during selected seasonal or hydrologic periods to provide improved spatial resolution for critical water-quality conditions. For the period and conditions sampled, they assess the spatial distribution of selected water-quality conditions in relation to causative factors, such as land use and contaminant sources.

Taxonomy is the division of biology concerned with the classification and naming of organisms. The classification of organisms is based upon a hierarchical scheme beginning with Kingdom and ending with Species at the base. The higher the classification level, the fewer features the organisms have in common. For example, the taxonomy of a particular mayfly, *Hexagenia limbata*, is the following:

Kingdom:Animal

Phylum:Arthropoda

Order:Ephemeroptera

Family:Ephemeridae

Genus:Hexagenia

Species:Hexagenia Limbata

Time-weighted average is computed by multiplying the number of days in the sampling period by the concentrations of individual constituents for the corresponding period and dividing the sum of the products by the total number of days. A time-weighted average represents the composition of water that would be contained in a vessel or reservoir that had received equal quantities of water from the stream each day for the year.

Tons per acre-foot indicates the dry mass of dissolved solids in 1 acre-foot of water. It is computed by multiplying the concentration of the constituent, in milligrams per liter, by 0.00136.

Tons per day (T/DAY) is the quantity of a substance in solution or suspension that passes a stream section during a 24-hour period.

Total is the total amount of a given constituent in a representative water-suspended sediment sample, regardless of the constituent's physical or chemical form. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent present in both the dissolved and suspended phases of the sample. A knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to judge when the results should be reported as "total." (Note that the word "total" does double duty here, indicating both that the sample consists of a water-suspended sediment mixture and that the analytical method determined all of the constituent in the sample.)

Total discharge is the total quantity of any individual constituent, as measured by dry mass or volume, that passes through a stream cross-section per unit of time. This term needs to be qualified, such as "total sediment discharge," "total chloride discharge," and so on.

Total, recoverable is the amount of a given constituent that is in solution after a representative water-suspended sediment sample has been digested by a method (usually using a dilute acid solution) that results in dissolution of only readily soluble substances. Complete dissolution of all particulate matter is not achieved by the digestion treatment, and thus the determination represents something less than the "total" amount (that is, less than 95 percent) of the constituent present in the dissolved and suspended phases of the sample. To achieve comparability of analytical data, equivalent digestion procedures are required of all laboratories performing such analyses because different digestion procedures are likely to produce different analytical results.

Tritium Network is a network of stations which has been established to provide baseline information on the occurrence of tritium in the Nation's surface waters. In addition to the surface-water stations in the network, tritium data are also obtained at a number of precipitation stations. The purpose of the precipitation stations is to provide an estimate sufficient for hydrologic studies of the tritium input to the United States.

Volatile Organic Compounds (VOCs) are organic compounds that can be isolated from the water phase of a sample by purging the water sample with inert gas, such as helium, and subsequently analyzed by gas chromatography. Many VOCs are man-made chemicals that are used and produced in the manufacture of paints, adhesives, petroleum products, pharmaceuticals, and refrigerants. They are often components of fuels, solvents, hydraulic fluids, paint thinners, and dry cleaning agents commonly used in urban settings. VOC contamination of drinking-water supplies is a human health concern because many are toxic and are known or suspected human carcinogens (U.S. Environmental Protection Agency, 1996).

Water year in U.S. Geological Survey reports dealing with surface-water supply is the 12-month period October 1 through September 30. The water year is designated by the calendar year in which it ends and which includes 9 of the 12 months. Thus, the year ending September 30, 1985, is called the "1985 water year."

WDR is used as an abbreviation for "Water-Data Report" in the REVISED RECORDS paragraph to refer to State annual hydrologic-data reports (WRD was used as an abbreviation for "Water-Resources Data" in reports published prior to 1976).

Weighted average is used in this report to indicate discharge-weighted average. It is computed by multiplying the discharge for a sampling period by the concentrations of individual constituents for the corresponding period and dividing the sum of the products by the sum of the discharges. A discharge-weighted average approximates the composition of water that would be found in a reservoir containing all the water passing a given location during the water year after thorough mixing in the reservoir.

WSP is used as an abbreviation for "Water-Supply Paper" in reference to previously published reports.